


**3RT1 contactors**  
**sizes S6 to S12 with accessories**

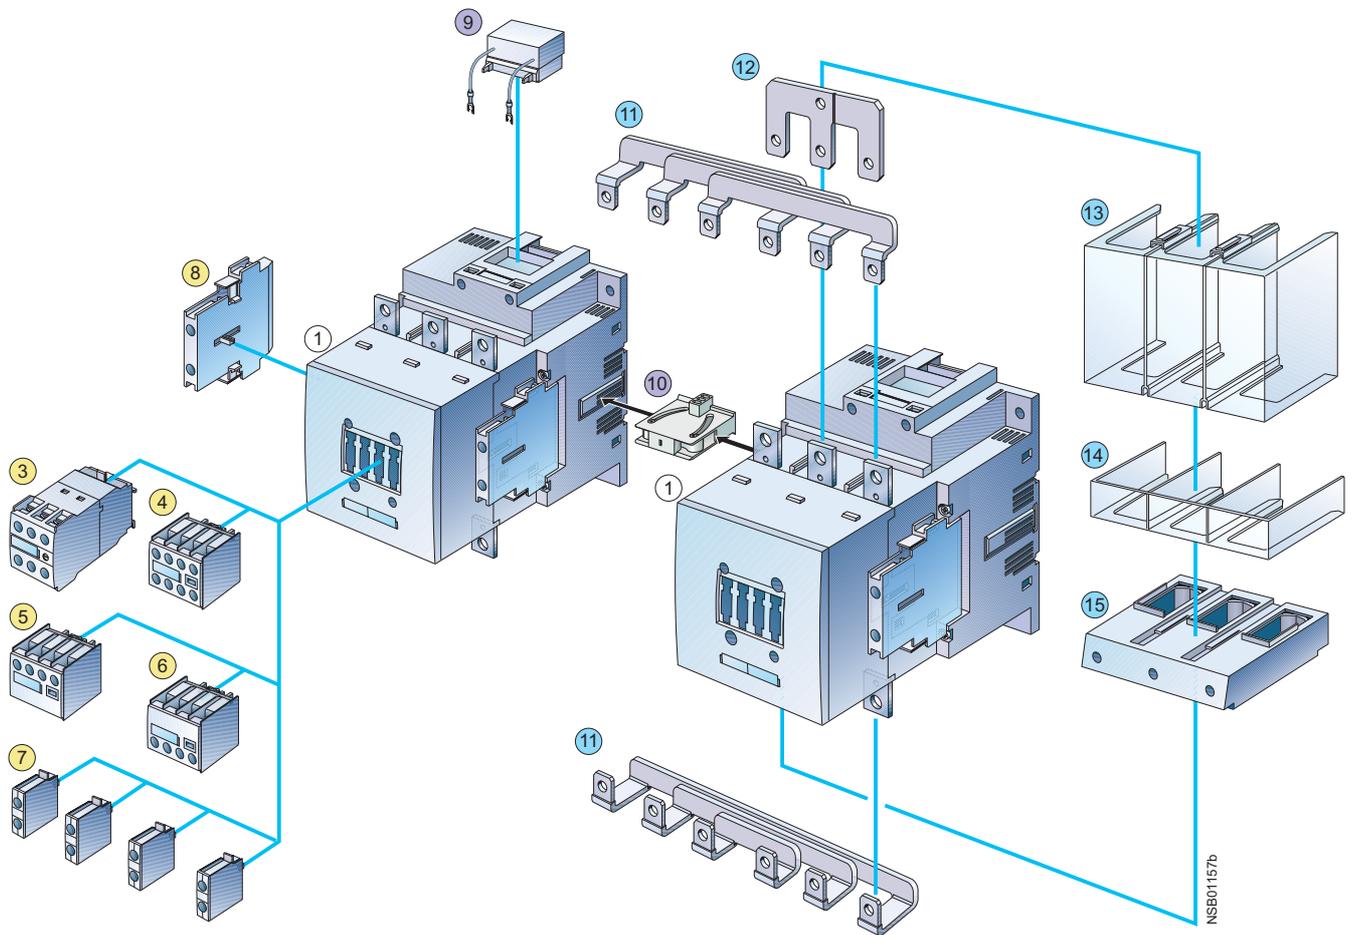

NSB00157b


① 3RT10 and 3RT14 air-break contactors, sizes S6, S10 and S12 (pages 2/59 and 2/124)

- ③ Auxiliary switch block, solid-state time-delay (page 2/184) (ON or OFF-delay or star-delta function)
- ④ 4-pole auxiliary switch block (page 2/180) (terminal designations acc. to EN 50012 or EN 50005)
- ⑤ 2-pole auxiliary switch block, cable entry from above (page 2/181)
- ⑥ 2-pole auxiliary switch block, cable entry from below (page 2/181)
- ⑦ Single-pole auxiliary switch block (up to 4 can be snapped on) (page 2/181)
- ⑧ 2-pole auxiliary switch block, laterally mountable (left or right) (page 2/182) (terminal designations acc. to EN 50012 or EN 50005) (identical for S0 to S12)
- ⑨ Surge suppressor (RC element) (page 2/187), for reversing duty into top of withdrawable coil
- ⑩ Mechanical interlock, laterally mountable (page 2/100)

- ⑪ Wiring connectors on the top and bottom (reversing duty) (page 2/102)
- ⑫ Link for paralleling (star jumper), 3-pole, with through hole (page 2/190), different for sizes S6 and S10/S12
- ⑬ Terminal cover for cable lug and bar connection (page 2/191), different for sizes S6 and S10/S12
- ⑭ Terminal cover for box terminal (page 2/191), different for sizes S6 and S10/S12
- ⑮ Box terminal block (page 2/191), different for sizes S6 and S10/S12

- Accessories identical for sizes S0 to S12
- Accessories identical for sizes S6 to S12
- Accessories differ according to size

For mountable overload relays see protection devices: Overload relays -> SIRIUS overload relays.

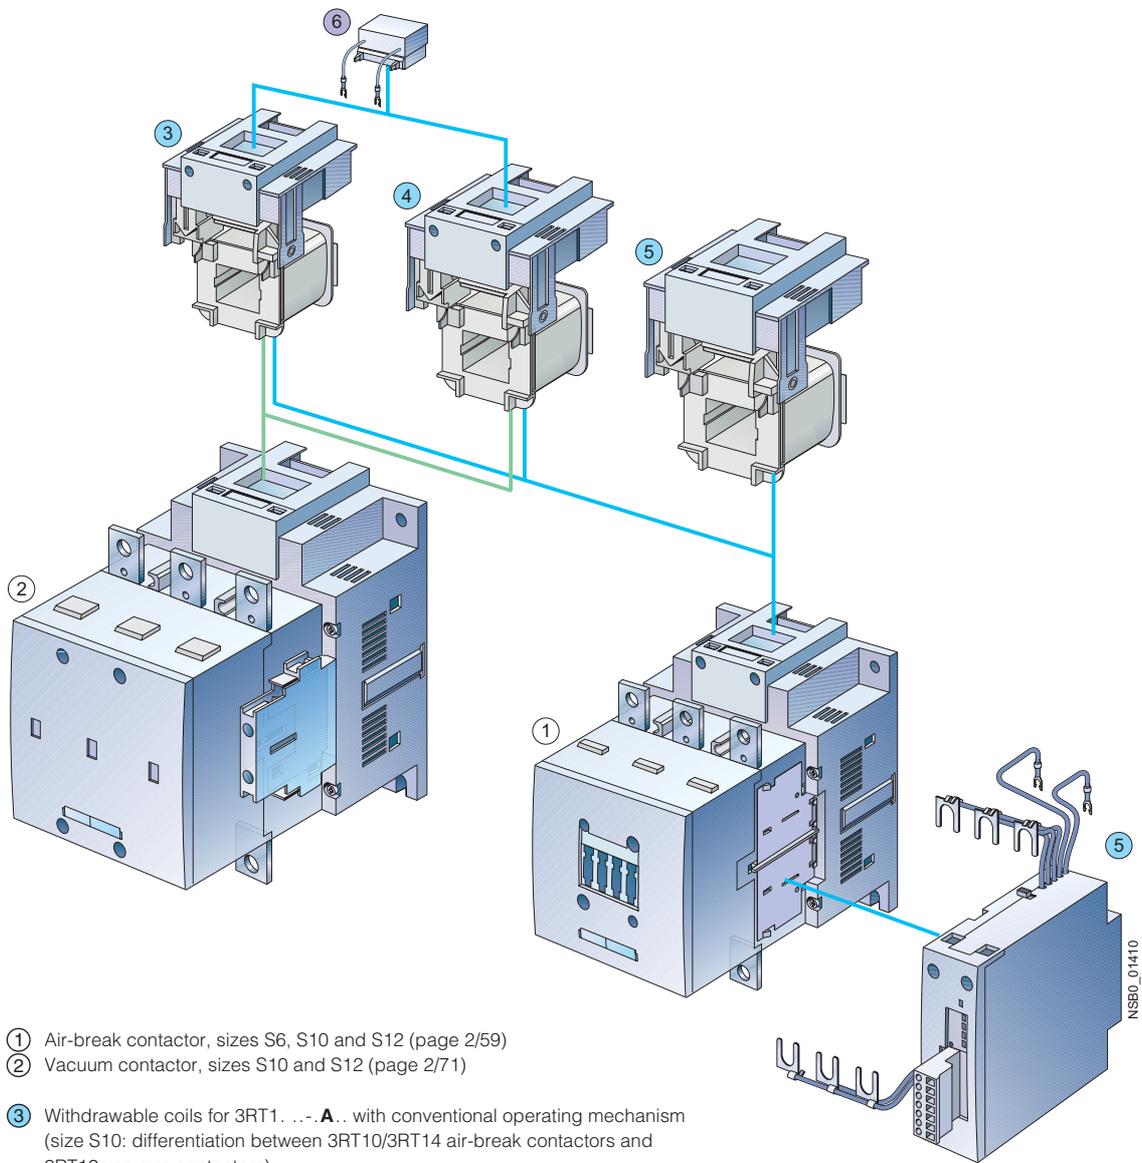

- ① Air-break contactor, sizes S6, S10 and S12 (page 2/59)  
 ② Vacuum contactor, sizes S10 and S12 (page 2/71)
- ③ Withdrawable coils for 3RT1...-A.. with conventional operating mechanism  
 (size S10: differentiation between 3RT10/3RT14 air-break contactors and 3RT12 vacuum contactors)  
 (size S12: the same for air-break and vacuum contactors)
- ④ Withdrawable coils for 3RT1...-N.. with solid-state operating mechanism  
 (size S10: differentiation between 3RT10/3RT14 air-break contactors and 3RT12 vacuum contactors)  
 (size S12: the same for air-break and vacuum contactors)
- ⑤ Withdrawable coils and laterally mountable module (plug-on) for 3RT1 air-break contactors  
 ...-P.. and 3RT1...-Q..
- ⑥ Surge suppressor (RC element) (page 2/187), plug-mountable on withdrawable coils
- with conventional operating mechanism 3RT1...-A..
  - with solid-state operating mechanism 3RT1...-N..
- Identical for sizes S6 to S12  
 ● Different according to size

For mountable overload relays see protection devices: Overload relays -> SIRIUS overload relays.