



High Speed Fuses - Square body DIN 43 620 690/700V (IEC/UL)


Total Clearing I2t

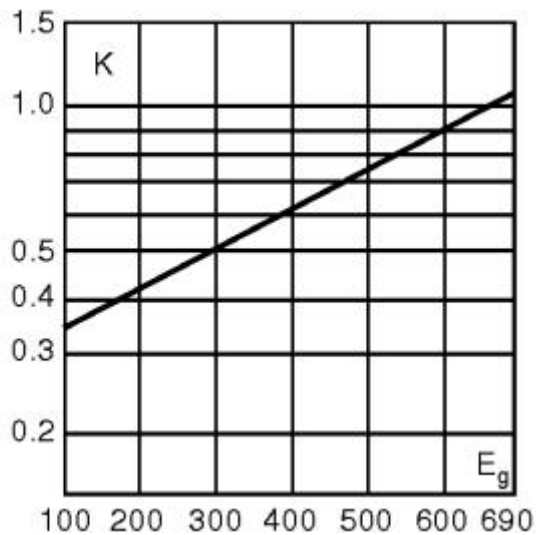


Dimensions (mm)

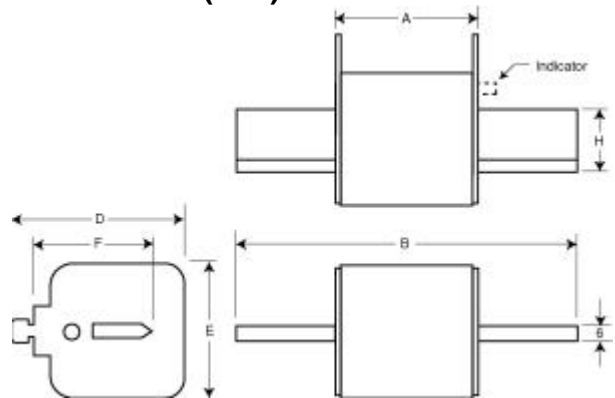


Arc Voltage

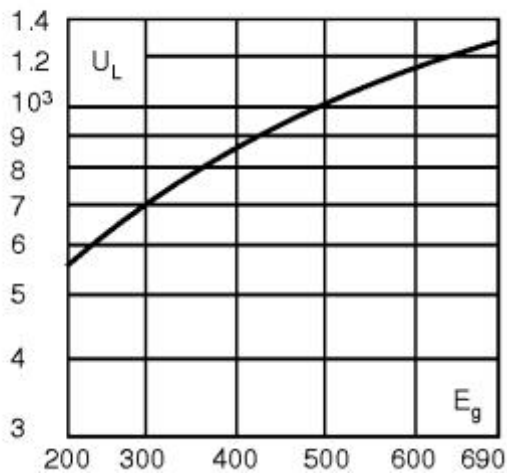


Power Losses

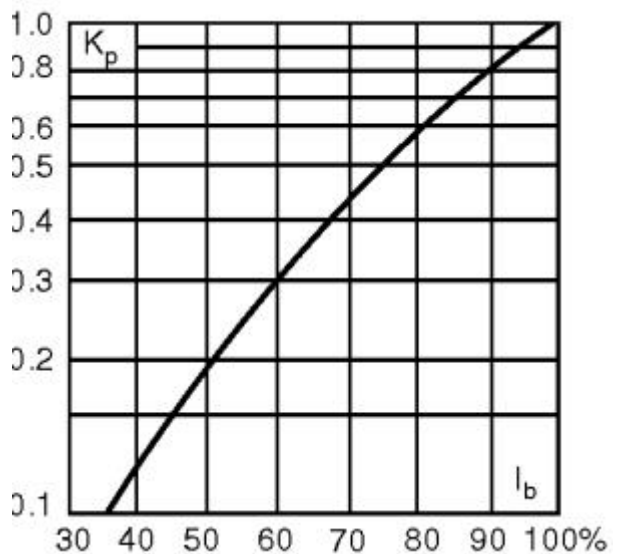


Size 3 – 500-2000A: 690V – Time Current Curve

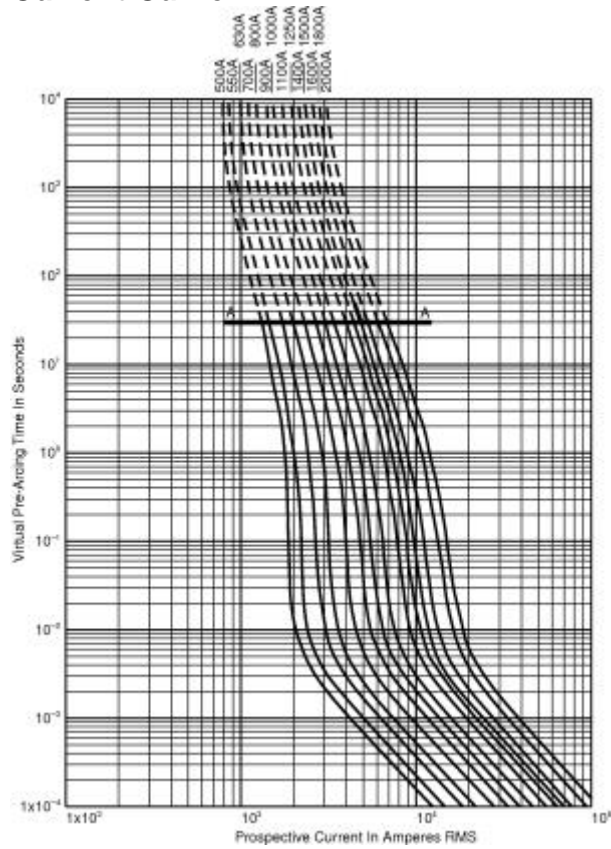


Size 3 – 500-2000A: 690V – Peak Let-Through Curve

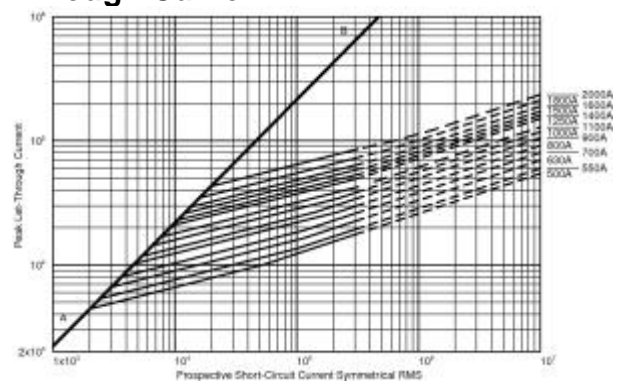


Size 2 – 400-1250A: 690V – Peak Let-Through Curve

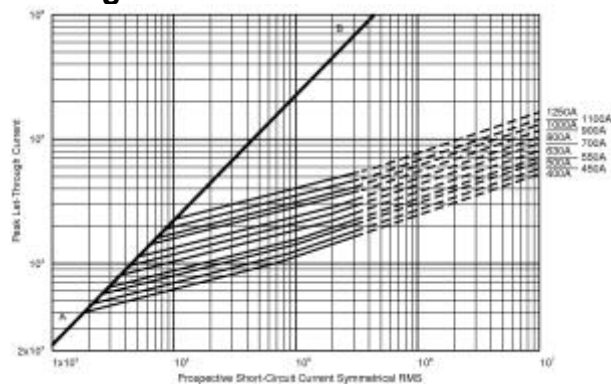

Size 2 – 400-1250A: 690V – Time Current Curve

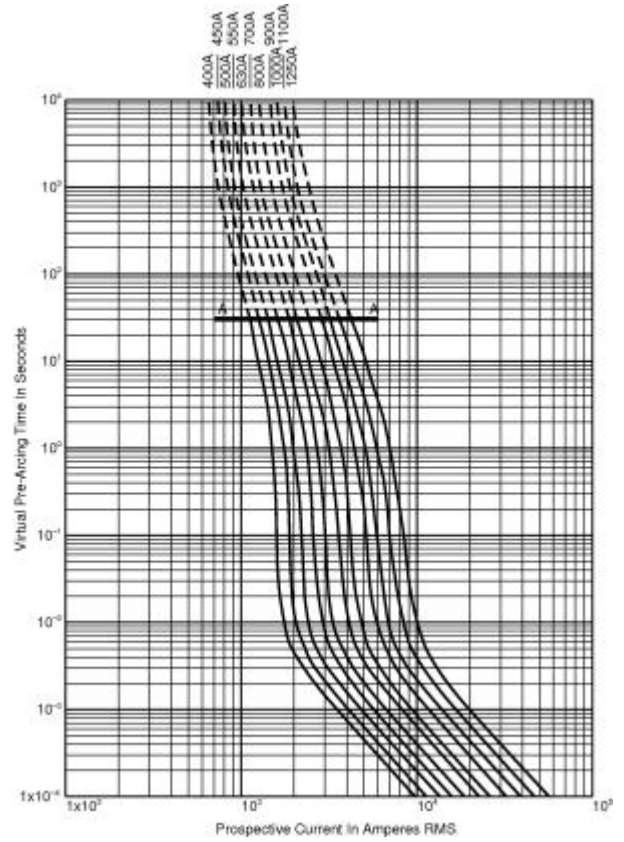

Size 1* – 40-630A: 690V – Peak Let-Through Curve

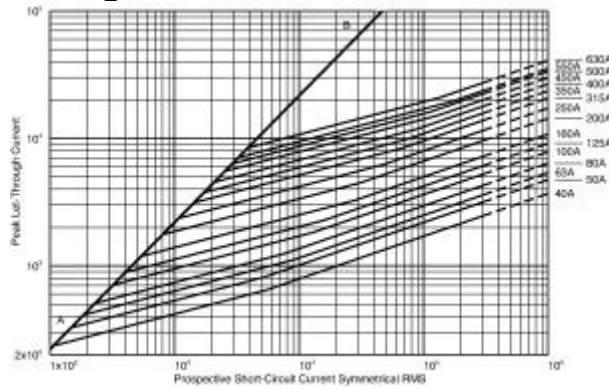

Size 1* – 40-630A: 690V – Time Current Curve

