


d mm Wire diameter  
 D mm Mean coil diameter  
 Dd mm Diameter of mandrel  
 De mm Outer coil diameter  
 Dh mm Diameter of bush  
 e1 mm Perm.dev. perpendicular line  
 e2 mm Perm.dev. parallel line  
 F1 N Prestressed spring force  
 F2 N Loaded spring force

Fn N Maximum force in static use  
 Fc N Theoretic maximum force at Lc  
 L0 mm Length of undressed spring  
 L1 mm Spring length at F1  
 L2 mm Spring length at F2  
 Lk mm Buckling length  
 Ln mm Spring length at Fn  
 Lc mm Block length  
 n pc Aktive coils

nt pc Total coils  
 R N/mm Spring rate  
 s mm Pitch (distance between coils)  
 S1 mm Spring deflection at F1  
 S2 mm Spring deflection at F2  
 Sh mm Excursion  
 Sn mm Spring deflection at Fn  
 Weight g Weight of one spring in grammes

Fndyn N Maximum force in dynamic force  
 Fndtol N (+/-) tolerance of maximum dynamic force  
 Lndyn mm Minimum length in dynamic use  
 Shdyn mm Maximum stroke in dynamic use

\* The spring data for the dynamic applications is relevant only for springs having a shot peened hardened surface !

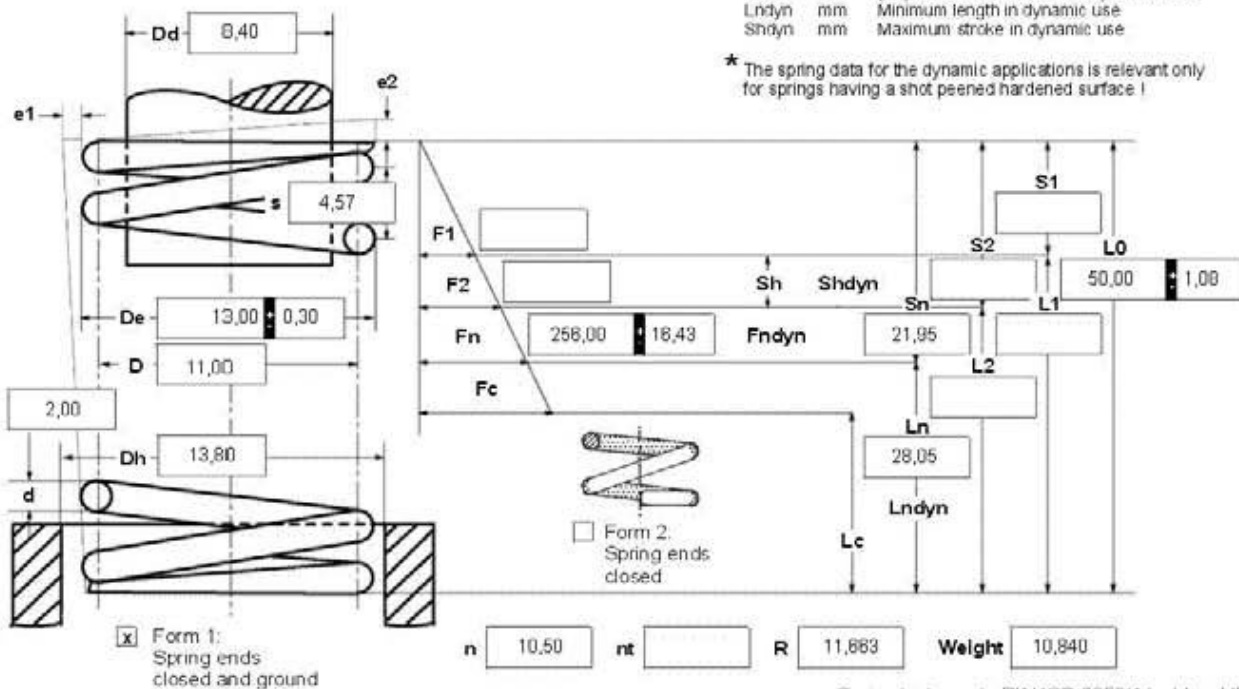

Spring test acc. to DIN ISO 2859/1 test level II

**1 Colling direction**  
 left  right

**2 Dynamic load \***

|        |        |
|--------|--------|
| Fndyn  | 238,10 |
| Fndtol | 16,16  |
| Lndyn  | 29,59  |
| Shdyn  | 8,97   |

**3 Excursion Sh**  mm

**4 Stress cyc. end. N**

**5 Stress cycle frequ. 1/s**  /

**6 Application temp.**  °C

Remarks

**7 Guidance and seat to DIN 2089/1**  
 mandrel  bush  
 Buckling length **Lk** at  
 v=0,5 / Bld 5  mm

**8 Material**

**9 Wire or rod surface**  
 drawn  rolled  metal-cut

**10 Springs deburred**  inside  outside

**11 Surface treatment**  shot peened

**12 Tolerances to DIN 2095**

| Grade | De, Di, D                           | L0                                  | F1, F2                              | e1, e2                              | Wire diameter d to DIN 2076         |
|-------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| 1     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            |
| 2     | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| 3     | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/>            | <input checked="" type="checkbox"/> |

**13 Production compensation through**

|  |               |                                     |
|--|---------------|-------------------------------------|
| A spring resistance and associated length of tensed spring     | L0            | <input type="checkbox"/>            |
| A spring resistance, associated length of tensed spring and L0 | n, d          | <input checked="" type="checkbox"/> |
|  | n, De, Di     | <input type="checkbox"/>            |
| Two spring resistances and associated lengths of tensed spring | L0, n, d      | <input type="checkbox"/>            |
|  | L0, n, De, Di | <input type="checkbox"/>            |

**14 Setting springs**  
 All springs which show setting tendency because of their size are pre-set within the production process.

**Prices**

| bulk/quantity | sc | single price [EUR] |
|---------------|----|--------------------|
| 1             |    | 2.6500 EUR         |
| 2             |    | 2.6500 EUR         |
| 3             |    | 2.6500 EUR         |
| 5             |    | 2.6500 EUR         |
| 7             |    | 1.8300 EUR         |
| 17            |    | 0.9500 EUR         |
| 37            |    | 0.6400 EUR         |
| 75            |    | 0.4800 EUR         |
| 125           |    | 0.3044 EUR         |
| 175           |    | 0.3423 EUR         |
| 250           |    | 0.3001 EUR         |
| 350           |    | 0.2501 EUR         |
| 450           |    | 0.2211 EUR         |