
ROBUR 8150

lifting web slings, purple 1t two layers with reinforced eyes high-tenacity polyester (PES) belt

The most widely used solution in many sectors due to their flexibility, lightness, manoeuvrability and ease of use.

ROBUR lifting web sling, which conforms to the European EN1492-1 standard, is made of high-quality, double-layer polyester with reinforced eyes for increased wear resistance.



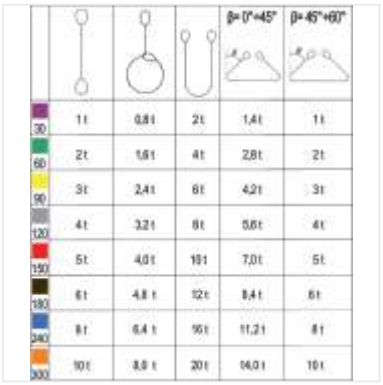

30	1t	0,8 t	2t	1,4 t	1t
60	2t	1,6 t	4t	2,8 t	2t
90	3t	2,4 t	6t	4,2 t	3t
120	4t	3,2 t	8t	5,6 t	4t
150	5t	4,0 t	10 t	7,0 t	5t
180	6t	4,8 t	12 t	8,4 t	6t
240	8t	6,4 t	16 t	11,2 t	8t
300	10 t	8,0 t	20 t	14,0 t	10 t

Certifications and Standards:

CE EN 1492-1

HIGH-TENACITY POLYESTER BELT

High-tenacity polyester offers weather resistance and excellent long-term stability. It has good resistance to acids, solvents and microorganisms and retains the same characteristics dry and wet.

VERSATILITY OF USE

Ideal for lifting delicate loads that could be damaged by rope or chain slings, or when working in corrosive environments or where there is a risk of electrical conduction.

TRACKABILITY

The label, made of tear-resistant material, is wrapped in transparent PVC protection and bears the manufacturer's name, load capacity, CE marking, batch code and serial marking. This label is often subject to wear and tear during use, and if the data are erased or the label is cut and lost, the band must be replaced: the additional PVC protection increases the life of the product! The manufacturer's logo and scope are also marked on the band for more immediate identification.

RANGE WIDTH AND COLOUR CODE

Available in multiple lengths and tonnages, the belt's colour code immediately identifies the working load limit; as well as the number of lines along the length of the sheath indicating its load capacity in tonnes.

Scan the QR Code to access the web tab


Specs, media and documentation in one click.

ROBUR 8150

lifting web slings, purple 1t two layers with reinforced eyes high-tenacity polyester (PES)

Technical Specifications

Dimensions

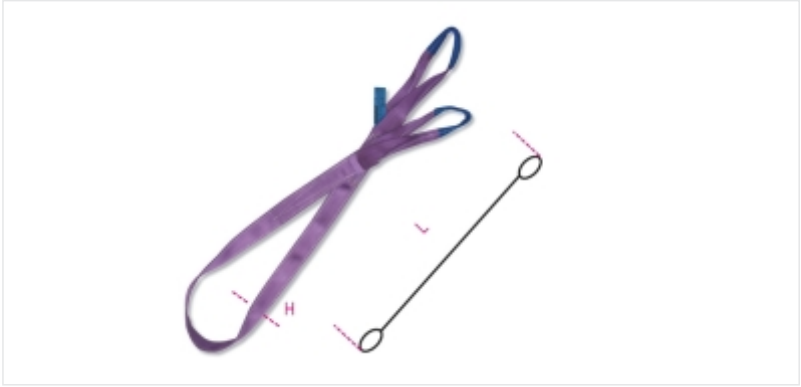

Certifications and Standards:

CE EN 1492-1

Coded items

	Art.	L m	H mm	WLL ton
081500005	8150 0,5-T1	0,5	30	1
081500010	8150 1-T1	1	30	1
081500015	8150 1,5-T1	1,5	30	1
081500020	8150 2-T1	2	30	1
081500025	8150 2,5-T1	2,5	30	1
081500030	8150 3-T1	3	30	1
081500035	8150 3,5-T1	3,5	30	1
081500040	8150 4-T1	4	30	1
081500050	8150 5-T1	5	30	1
081500060	8150 6-T1	6	30	1
081500080	8150 8-T1	8	30	1

Scan the QR Code to access the web tab
Specs, media and documentation in one click.