
ROBUR 8157

lifting web slings, grey 4t two layers with reinforced eyes high-tenacity polyester (PES) belt

The most widely used solution in many sectors due to their flexibility, lightness, manoeuvrability and ease of use.

ROBUR lifting web sling, which conforms to the European EN1492-1 standard, is made of high-quality, double-layer polyester with reinforced eyes for increased wear resistance.



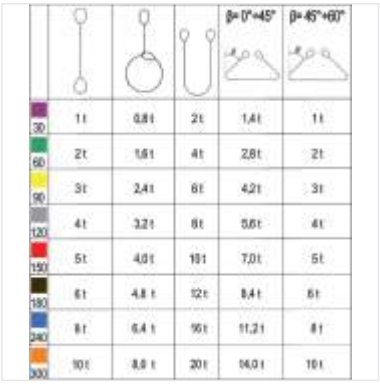

					β= 0°÷45°	β= 45°÷60°
30	1 t	0,8 t	2 t	1,4 t	1 t
60	2 t	1,6 t	4 t	2,8 t	2 t
90	3 t	2,4 t	6 t	4,2 t	3 t
120	4 t	3,2 t	8 t	5,6 t	4 t
150	5 t	4,0 t	10 t	7,0 t	5 t
180	6 t	4,8 t	12 t	8,4 t	6 t
240	8 t	6,4 t	16 t	11,2 t	8 t
300	10 t	8,0 t	20 t	14,0 t	10 t

Certifications and Standards:

CE EN 1492-1

HIGH-TENACITY POLYESTER BELT

High-tenacity polyester offers weather resistance and excellent long-term stability. It has good resistance to acids, solvents and microorganisms and retains the same characteristics dry and wet.

VERSATILITY OF USE

Ideal for lifting delicate loads that could be damaged by rope or chain slings, or when working in corrosive environments or where there is a risk of electrical conduction.

TRACKABILITY

The label, made of tear-resistant material, is wrapped in transparent PVC protection and bears the manufacturer's name, load capacity, CE marking, batch code and serial marking. This label is often subject to wear and tear during use, and if the data are erased or the label is cut and lost, the band must be replaced: the additional PVC protection increases the life of the product! The manufacturer's logo and scope are also marked on the band for more immediate identification.

RANGE WIDTH AND COLOUR CODE

Available in multiple lengths and tonnages, the colour code of the webbing immediately identifies the working load limit; as well as the number of lines along the length of the webbing indicates its load capacity in tonnes.

ROBUR 8157

lifting web slings, grey 4t two layers with reinforced eyes high-tenacity polyester (PES)

Technical Specifications

Dimensions



Certifications and Standards:

CE EN 1492-1

Coded items

	Art.	L m	H mm	WLL ton
081570020	8157 2-T4	2	120	4
081570030	8157 3-T4	3	120	4
081570040	8157 4-T4	4	120	4
081570050	8157 5-T4	5	120	4
081570060	8157 6-T4	6	120	4
081570080	8157 8-T4	8	120	4
081570100	8157 10-T4	10	120	4
081570120	8157 12-T4	12	120	4

Scan the QR Code to access the web tab

Specs, media and documentation in one click.