



Series


2/2 Valves



3/2 Valves



4/2 Valves



Port Size	DIMEN	
	A	B
G 1/4 to G 1/2	90	175
G 1/2 to G 1	116	193
G 1 to G 1-1/2	168	263
G 1-1/2 to G 2-1/2	219	300

Ives

verage k_v	Weight
. N.O.	kg
2,0	1,1
2,9	
3,1	
5,7	1,5
6,4	
6,9	
18	3,2
17	
18	
43	6,9
50	
63	

verage k_v	Weight
N.C. N.O.	kg
2,4 2,2	1,1
3,9 2,6	
3,8 2,6	
6,8 6,2	1,5
8,2 6,2	
8,7 6,2	
25 18	3,2
27 19	
27 18	
60 51	7,4
61 52	
62 48	

k_v	Weight
	kg
	1,4
	2,4
	5,1

or valves on this page.
page 3 for voltages.
sh, 30 VA holding on


C.

n recommended.


0 bar.
10 bar.
pply is used, pressure
let pressure.
s, consult ROSS).

S


2/2 Valves



3/2 Valves



4/2 Valves



Port Size	A
G 1/4 to G 1/2	90
G 1/2 to G 1	116
G 1 to G 1-1/2	168
G 1-1/2 to G 2-1/2	219



alves

ers ally n	Average k_v		Weight kg
	N.C.	N.O.	
2001	2,0	2,0	0,6
3001	3,3	2,9	
4011	3,5	3,1	
4001	6,7	5,7	0,9
5001	7,9	6,4	
6011	7,9	6,9	
6001	21	18	3,6
7001	25	17	
8011	25	18	
8001	43	43	6,4
9001	50	50	
9011	56	63	

umbers ormally Open	Average k_v		Weight kg
	N.C.	N.O.	
54A2001	2,4	2,2	0,6
54A3001	3,9	2,6	
54A4011	3,8	2,6	
54A4001	6,8	6,2	0,9
54A5001	8,2	6,2	
54A6011	8,7	6,2	
54A6001	25	18	2,7
54A7001	27	19	
54A8011	27	18	
54A8001	60	51	6,9
54A9001	61	52	
54A9011	62	48	

Average k_v	Weight kg
2,2	0,8
3,1	
3,2	
6,0	1,9
7,1	
7,8	
20	4,6
21	
21	

TIONS:


ature: 4° to 80°C.
r. 5 micron recommended.

zes: 1 to 10 bar.
Sizes: 2 to 10 bar.
e equal to or greater than

PT threads, consult ROSS).


Series 2

4/2 Valves



DIMEN	
Port Size	A
G 1/4 to G 1/2	23
G 1/2 to G 1	23
G 1 to G 1-1/2	23

Indicator Light Ki

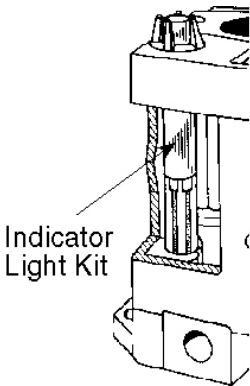

An indicator light extends thr and is illuminated when the s are standard on double sole

An indicator light is availabl models in Series 16, Series 27. Order kit number **862K8** solenoid.

alves

erage k _v	Weight kg
2,2	1,8
3,1	
3,2	
6,0	2,8
7,1	
7,8	
20	5,5
21	
21	

alves on this page.

d; 190 VA inrush, ts on DC. ousing.

commended.


s used, pressure pressure. nsult ROSS).

andard on single ries 27. Double ave flush metal-ocking.


below is made of king type button, osition by turning screwdriver.

- Kit 792K87
- Kit 790K87


NDED BUTTON locking type **91K87**




Seri



2/2 Valves

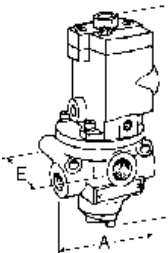

3/2 Valves

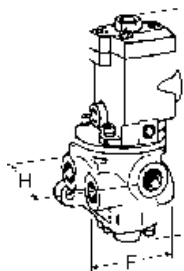

4/2 Valves

DI		
Port Size	A	B
G 1/4 to G 1/2	90	17
G 1/2 to G 1	116	19
G 1 to G 1-1/2	168	26



Valves

erature) SERVICE		
mally pen	4/2 Valves	Weight kg
4B2001	D2176B2001	1,4
4B3001	D2176B3001	
4B4011	D2176B4011	
4B4001	D2176B4001	1,5
4B5001	D2176B5001	
4B6011	D2176B6011	
4B6001	D2176B6001	3,4
4B7001	D2176B7001	
4B8011	D2176B8011	

erature) SERVICE		
ss mally pen	4/2 Valves	Weight kg
4B2002	D2176B2002	1,4
B3002	D2176B3002	
4B4012	D2176B4012	
4B4002	D2176B4002	2,6
B5002	D2176B5002	
4B6012	D2176B6012	
4B6002	D2176B6002	5,4
B7002	D2176B7002	
B8012	D2176B8012	

: For valves on this page.

inrush, 30 VA holding on

metal button.

: -17° to 122°C.

-17° to 150°C.


must be free of water vapor

cron recommended.


al supply is used, pressure
n inlet pressure.
ads, consult ROSS).
sponding Series D27.

Series


Ives



2/2 Valves



3/2 Valves



4/2 Valves

SERVICE

4/2 Valves	Weight kg)
D2156B2001	
D2156B3001	0,8
D2156B4011	
D2156B4001	
D2156B5001	2,0
D2156B6011	
D2156B6001	
D2156B7001	5,0
D2156B8011	

SERVICE

4/2 Valves	Weight kg
2 D2156B2002	
2 D2156B3002	0,8
2 D2156B4012	
2 D2156B4002	
2 D2156B5002	2,0
2 D2156B6012	
2 D2156B6002	
2 D2156B7002	5,0
2 D2156B8012	

DIMEN

Port Size	A	B	C
G 1/4 to G 1/2	90	94	77
G 1/2 to G 1	116	112	77
G 1 to G 1-1/2	168	190	104

alves on this page.

be free of water vapor

commended.

ter than inlet pressure.
onsulting ROSS).
Series D27 models.