


**ROSS CONTROLS®**



---

## **ANSI VALVES W70 & W74 SERIES**

---

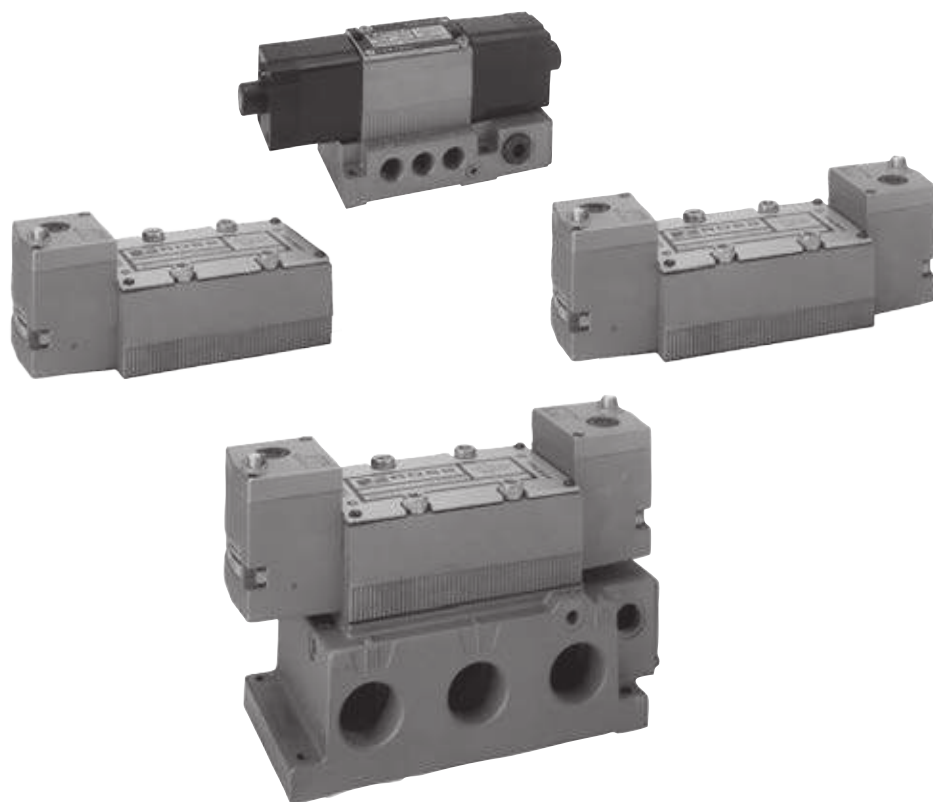

## ANSI SERIES VALVES – KEY FEATURES

- ANSI Sizes 1, 2.5, 4, 10 and 20
- 5/2- and 5/3 way direct and pilot solenoid options
- Spool & Sleeve construction
- 24 volts DC or 110 volts AC solenoid control
- Available with 1/4 – 1½ ports
- Lube or non-lube service
- Manual overrides
- Interpose pressure regulators
- Single sub-base mounting
- Micro-thin air bearing between spool and sleeve assures quick valve response
- W70 Series - Suitable for vacuum service with or without external pilot supply
- W74 Series - Suitable for vacuum service (with external pilot supply)

| VALVE TYPE            | VALVE SERIES | DESCRIPTION |                |        | AVAILABLE PORT SIZES |     |     |     |     |   |    |    | FUNCTIONS  |            |            |                   |                 |                     |               |                  |                         | Page          |
|-----------------------|--------------|-------------|----------------|--------|----------------------|-----|-----|-----|-----|---|----|----|------------|------------|------------|-------------------|-----------------|---------------------|---------------|------------------|-------------------------|---------------|
|                       |              | ANSI Size   | Spool & Sleeve | Poppet | 1/8                  | 1/4 | 3/8 | 1/2 | 3/4 | 1 | 1¼ | 1½ | 3/2 Single | 5/2 Single | 5/2 Double | 5/3 Closed Center | 5/3 Open Center | 5/3 Pressure Center | Max Flow (Cv) | Solenoid Control | Direct Solenoid Control |               |
|                       |              |             |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 |                     |               |                  |                         |               |
| ANSI                  | W70          | 1           |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 1.0                 |               |                  |                         | A5.3 - A5.9   |
| ANSI                  | W70          | 2.5         |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 2.5                 |               |                  |                         | A5.3 - A5.9   |
| ANSI                  | W70          | 4           |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 4.2                 |               |                  |                         | A5.3 - A5.9   |
| ANSI                  | W70          | 10          |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 10.0                |               |                  |                         | A5.3 - A5.9   |
| ANSI                  | W70          | 20          |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 22.0                |               |                  |                         | A5.3 - A5.9   |
|                       |              |             |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 |                     |               |                  |                         |               |
| ANSI                  | W74          | 1           |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 1.0                 |               |                  |                         | A5.11 - A5.13 |
| ANSI                  | W74          | 2.5         |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 2.5                 |               |                  |                         | A5.11 - A5.13 |
| ANSI                  | W74          | 4           |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 4.2                 |               |                  |                         | A5.11 - A5.13 |
| ANSI                  | W74          | 10          |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 10.0                |               |                  |                         | A5.11 - A5.13 |
| ANSI                  | W74          | 20          |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 | 22.0                |               |                  |                         | A5.11 - A5.13 |
| Sub-Bases & Manifolds |              |             |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 |                     |               |                  |                         | A5.14 - A5.18 |
| Accessories           |              |             |                |        |                      |     |     |     |     |   |    |    |            |            |            |                   |                 |                     |               |                  |                         | A5.19         |

# Direct Solenoid Controlled Valves

ANSI  
W70 Series

| 5-Way 2-Position Valves, Single Direct Solenoid, Spring Return |           |                        |                        |                             |        |          |                   |                                                                                    |
|----------------------------------------------------------------|-----------|------------------------|------------------------|-----------------------------|--------|----------|-------------------|------------------------------------------------------------------------------------|
| ANSI<br>Size                                                   | Port Size | Valve Model<br>Number* | Avg.<br>C <sub>v</sub> | Average Response Constants# |        |          | Weight lb<br>(kg) |  |
|                                                                |           |                        |                        | M                           | F      |          |                   |                                                                                    |
|                                                                |           |                        |                        |                             | In-Out | Out-Exh. |                   |                                                                                    |
| 1                                                              | 1/4 - 3/8 | W7016B2331**           | 1.0                    | 20                          | 3.5    | 4.9      | 3.5 (1.6)         |                                                                                    |
| 2.5                                                            | 3/8 - 1/2 | W7016A3331**           | 2.5                    | 17                          | 1.6    | 2.7      | 3.3 (1.5)         |                                                                                    |
| 4                                                              | 3/8 - 3/4 | W7016C4331**           | 4.2                    | —                           | —      | —        | 4.3 (1.9)         |                                                                                    |



A

| 5-Way 2-Position Valves, Double Direct Solenoid, Detented |           |                     |                     |                             |        |          |                |
|-----------------------------------------------------------|-----------|---------------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                                                 | Port Size | Valve Model Number* | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                                           |           |                     |                     | M                           | F      |          |                |
|                                                           |           |                     |                     |                             | In-Out | Out-Exh. |                |
| 1                                                         | 1/4 - 3/8 | W7016B2332**        | 1.0                 | 20                          | 3.5    | 4.9      | 3.5 (1.6)      |
| 2.5                                                       | 3/8 - 1/2 | W7016A3332**        | 2.5                 | 10                          | 1.3    | 1.8      | 3.3 (1.5)      |
| 4                                                         | 3/8 - 3/4 | W7016C4332**        | 4.2                 | —                           | —      | —        | 4.3 (1.9)      |




14 4 2 5 13

| 5-Way 3-Position Valves, Double Direct Solenoid |           |                     |               |              |                     |                             |        |          |                |
|-------------------------------------------------|-----------|---------------------|---------------|--------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                                       | Port Size | Valve Model Number* |               |              | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                                 |           | Power Center        | Closed Center | Open Center  |                     | M                           | F      |          |                |
|                                                 |           |                     |               |              |                     |                             | In-Out | Out-Exh. |                |
| 1                                               | 1/8 - 3/8 | W7017B2905**        | W7017B2331**  | W7017B2332** | 1.0                 | 20                          | 3.5    | 4.9      | 4.5 (2.0)      |
| 2.5                                             | 3/8 - 1/2 | —                   | W7017A3331**  | W7017A3332** | 1.9                 | 10                          | 1.3    | 1.8      | 5.0 (2.3)      |
| 4                                               | 1/2 - 3/4 | —                   | W7017C4331**  | W7017C4332** | 3.8                 | —                           | —      | —        | 5.8 (2.6)      |

Power Center

Closed Center

Open Center



A5



Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.

Insert voltage code: “ ” = 24 volts DC; “ ” = 110-120 volts AC, 50/60 Hz; e.g., W7016B2331 . For other voltages, consult ROSS.



**Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

## ANSI Size 1



## Valve Dimensions – inches (mm)

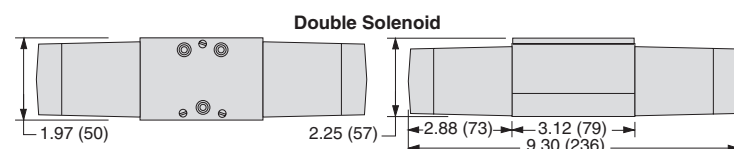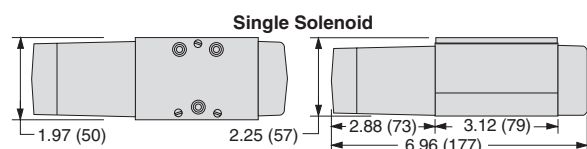

## ANSI Size 2.5

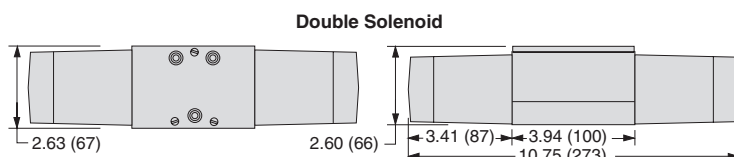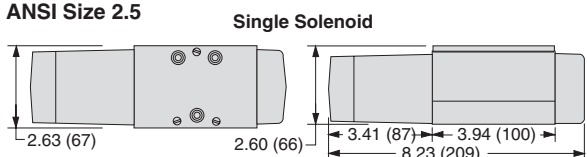

## ANSI Size 4

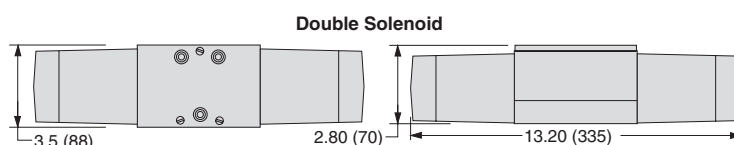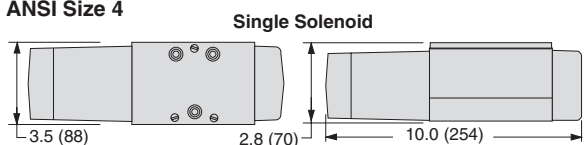

Options: Indicator Light (in Base/Manifold), refer to page A5.17-A5.18. Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Spool and sleeve.

**Mounting Type:** Base.

**Solenoid Pilot:** Rated for continuous duty.

**Solenoids:** AC power; DC for ANSI size 1 models only.

**Standard Voltages:** 24 volts DC; 110-120 volts AC, 50/60 Hz.

**Power Consumption (each solenoid):**

ANSI Size 1: 140 VA inrush, 30 VA holding on 50 or 60 Hz; 20 watts on DC.

ANSI Size 2.5 and 4: 380 VA inrush, 79 VA holding.

**Ambient Temperature:** 40° to 120°F (4° to 50°C).

**Media Temperature:** 40° to 175°F (4° to 80°C).

For other temperature ranges, consult ROSS.

**Flow Media:** Filtered air.

**Inlet Pressure:** Vacuum to 150 psig (10 bar).

**Manual Override:** Flush; rubber non-locking.

Please read carefully and thoroughly all of the

on the inside back cover.



Online Version  
Rev. 11/14/16

A5.3

# Single Solenoid Pilot Controlled Valves

ANSI  
W70 Series

A


| 5-Way 2-Position Valves, Spring Return |           |                     |                     |                             |        |          |                |
|----------------------------------------|-----------|---------------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                              | Port Size | Valve Model Number* | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                        |           |                     |                     | M                           | F      |          |                |
|                                        |           |                     |                     |                             | In-Out | Out-Exh. |                |
| 1                                      | 1/4 - 3/8 | W7076B2331**        | 1.0                 | 20                          | 3.6    | 4.9      | 3.0 (1.4)      |
| 2.5                                    | 3/8 - 1/2 | W7076A3331**        | 2.5                 | 17                          | 1.6    | 2.7      | 3.0 (1.4)      |
| 4                                      | 3/8 - 3/4 | W7076D4331**        | 4.2                 | 20                          | 0.6    | 0.6      | 5.3 (2.4)      |
| 10                                     | 3/4 - 1¼  | W7076C6331**        | 10                  | 30                          | 0.3    | 0.3      | 7.3 (3.3)      |
| 20                                     | 1¼ - 1½   | W7076C8331**        | 22                  | 50                          | 0.1    | 0.2      | 14.5 (6.5)     |

\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.

\*\* Insert voltage code: “W” = 24 volts DC; “Z” = 100-110/50, 100-130/60 volts AC/Hz; e.g., W7076B2331W.


For other voltages, consult ROSS.

# **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




## Valve Dimensions – inches (mm)


### ANSI Size 1

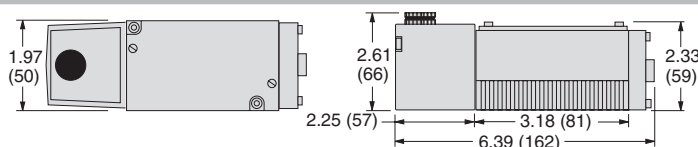


### ANSI Size 2.5

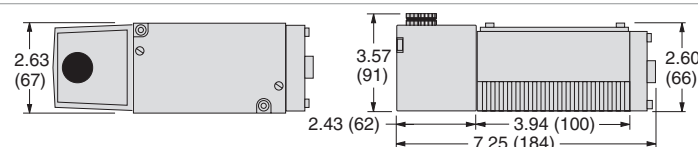


### ANSI Size 4

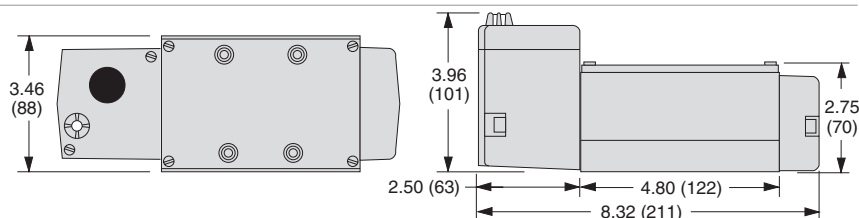

### ANSI Size 10

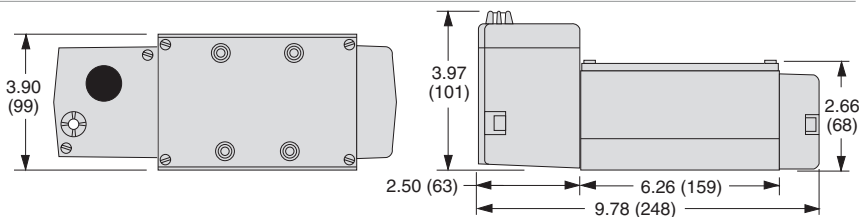

### ANSI Size 20

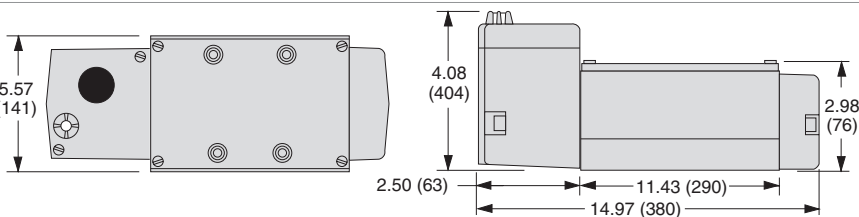

Options: Indicator Light (in Base/Manifold), refer to page A5.17-A5.18. Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Spool and sleeve.

**Mounting Type:** Base.

**Solenoid Pilot:** Rated for continuous duty.

**Standard Voltages:** 24 volts DC; 100-110/50, 100-130/60 volts AC/Hz.

**Power Consumption (each solenoid):**

ANSI Size 1: 10 VA inrush, 24 VA holding on 50 or 60 Hz; 5 watts on DC.

ANSI Size 2.5, 4, 10 & 20: 87 VA inrush, 55 VA holding on 50 or 60 Hz; 14 watts on DC.

**Ambient Temperature:** 40° to 120°F (4°C to 50°C).

**Media Temperature:** 40° to 175°F (4° to 80°C).

For other temperature ranges, consult ROSS.

**Flow Media:** Filtered air.

**Inlet Pressure:** Vacuum to 150 psig (10 bar).

**Pilot Pressure:**

ANSI Size 1 & 20: At least 30 psig (2 bar).

ANSI Size 2.5, 4 & 10: At least 15 psig (1 bar).

**Indicator Light:** Size 4, 10 & 20 models only.


**Manual Override:** Flush; rubber, non-locking.

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

# Double Solenoid Pilot Controlled Valves

ANSI  
W70 Series

| 5-Way 2-Position Valves, Detented |           |                     |                     |                             |        |          |                |
|-----------------------------------|-----------|---------------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                         | Port Size | Valve Model Number* | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                   |           |                     |                     | M                           | F      |          |                |
|                                   |           |                     |                     |                             | In-Out | Out-Exh. |                |
| 1                                 | 1/4 - 3/8 | W7076B2332**        | 1.0                 | 20                          | 3.5    | 4.9      | 4.0 (1.8)      |
| 2.5                               | 3/8 - 1/2 | W7076A3332**        | 2.5                 | 10                          | 1.3    | 1.8      | 4.0 (1.8)      |
| 4                                 | 3/8 - 3/4 | W7076D4332**        | 4.2                 | 12                          | 0.6    | 0.7      | 6.5 (2.9)      |
| 10                                | 3/4 - 1¼  | W7076C6332**        | 10                  | 20                          | 0.3    | 0.3      | 9.0 (4.1)      |
| 20                                | 1¼ - 1½   | W7076C8332**        | 22                  | 30                          | 0.1    | 0.2      | 15.8 (6.8)     |



\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.

\*\* Insert voltage code: “W” = 24 volts DC; “Z” = 100-110/50, 100-130/60 volts AC/Hz; e.g., W7076B2332W.  
For other voltages, consult ROSS.


# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




A

## Valve Dimensions – inches (mm)


### ANSI Size 1

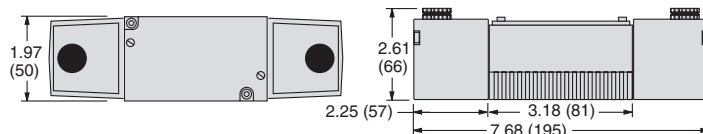


### ANSI Size 2.5

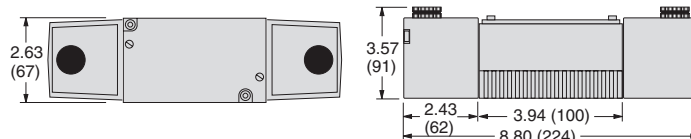


### ANSI Size 4

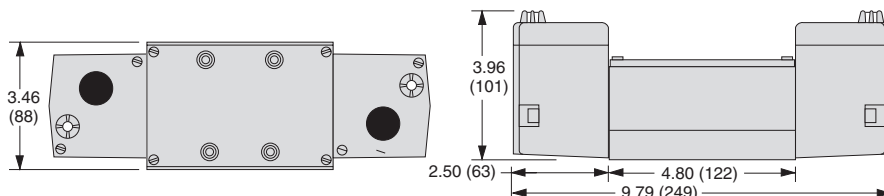

### ANSI Size 10

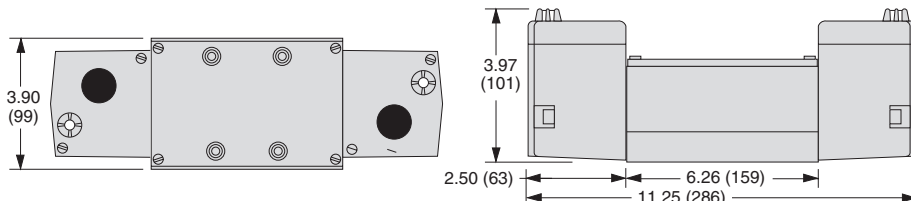

### ANSI Size 20

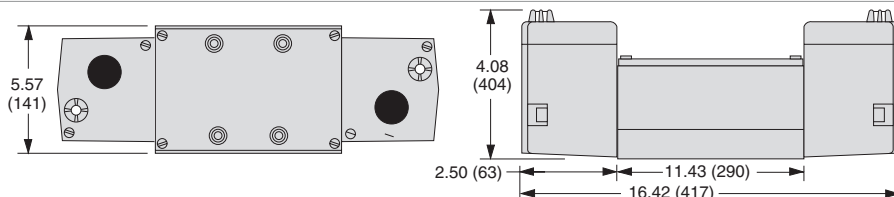

Options: Indicator Light (in Base/Manifold), refer to page A5.17-A5.18. Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Spool and sleeve.

**Mounting Type:** Base.

**Solenoid Pilot:** Rated for continuous duty.

**Standard Voltages:** 24 volts DC; 100-110/50, 100-130/60 volts AC/Hz.

**Power Consumption (each solenoid):**

ANSI Size 1: 10 VA inrush, 24 VA holding on 50 or 60 Hz; 5 watts on DC.

ANSI Size 2.5, 4, 10 & 20: 87 VA inrush, 55 VA holding on 50 or 60 Hz; 14 watts on DC.

**Ambient Temperature:** 40° to 120°F (4°C to 50°C).

**Media Temperature:** 40° to 175°F (4° to 80°C).

For other temperature ranges, consult ROSS.

**Flow Media:** Filtered air.

**Inlet Pressure:** Vacuum to 150 psig (10 bar).

**Pilot Pressure:**

ANSI Size 1 & 20: At least 30 psig (2 bar).

ANSI Size 2.5, 4 & 10: At least 15 psig (1 bar).

**Indicator Light:** Size 4, 10 & 20 models only.

**Manual Override:** Flush; rubber, non-locking.

Please read carefully and thoroughly all of the

on the inside back cover.




Online Version  
Rev. 11/14/16

# Double Solenoid Pilot Controlled Valves

ANSI  
W70 Series


A

| 5-Way 3-Position Valves |           |                     |               |              |                        |                             |        |          |                   |
|-------------------------|-----------|---------------------|---------------|--------------|------------------------|-----------------------------|--------|----------|-------------------|
| ANSI<br>Size            | Port Size | Valve Model Number* |               |              | Avg.<br>C <sub>v</sub> | Average Response Constants# |        |          | Weight<br>lb (kg) |
|                         |           | Power Center        | Closed Center | Open Center  |                        | M                           | F      |          |                   |
|                         |           |                     |               |              |                        |                             | In-Out | Out-Exh. |                   |
| 1                       | 1/8 - 3/8 | W7077B2906**        | W7077B2331**  | W7077B2332** | 1.0                    | 20                          | 3.5    | 4.9      | 4.0 (1.8)         |
| 2.5                     | 3/8 - 1/2 | W7077A3904**        | W7077A3331**  | W7077A3332** | 2.5                    | 10                          | 1.6    | 2.6      | 4.0 (1.8)         |
| 4                       | 1/2 - 3/4 | W7077C4939**        | W7077D4331**  | W7077D4332** | 4.2                    | 12                          | 0.6    | 0.7      | 6.5 (2.9)         |
| 10                      | 3/4 - 1¼  | W7077A6920**        | W7077C6331**  | W7077C6332** | 10                     | 20                          | 0.3    | 0.3      | 8.5 (3.8)         |
| 20                      | 1¼ - 1½   | W7077A8901**        | W7077C8331**  | W7077C8332** | 22                     | 30                          | 0.1    | 0.2      | 15.3 (6.9)        |




14 12 5 1 3 4 2

Power Center



14 12 5 1 3 4 2

Closed Center



14 12 5 1 3 4 2

Open Center

\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.


\*\* Insert voltage code: “W” = 24 volts DC; “Z” = 100-110/50, 100-130/60 volts AC/Hz; e.g., W7077B2906W.

For other voltages, consult ROSS.

# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.



## Valve Dimensions – inches (mm)

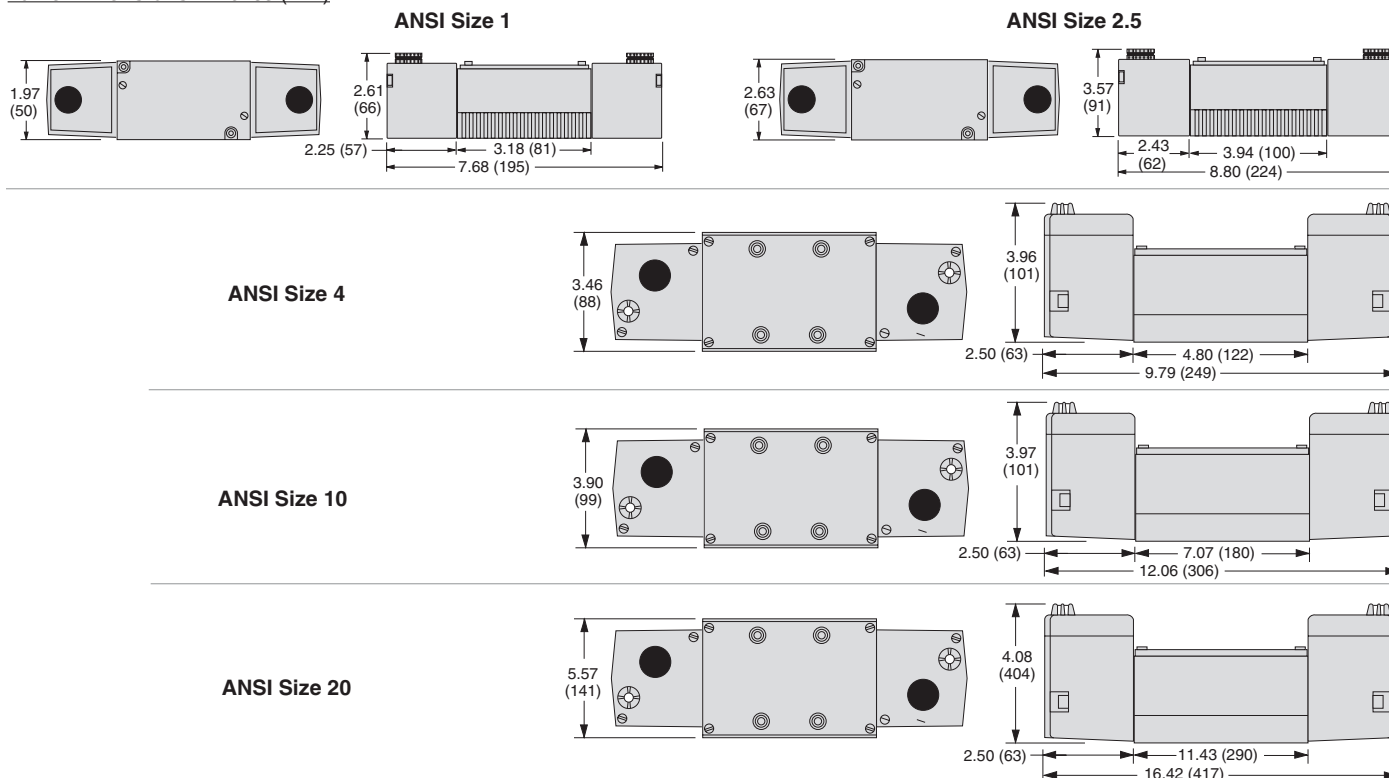

Options: Indicator Light (in Base/Manifold), refer to page A5.17-A5.18. Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Spool and sleeve.

**Mounting Type:** Base.

**Solenoid Pilot:** Rated for continuous duty.

**Standard Voltages:** 24 volts DC; 100-110/50, 100-130/60 volts AC/Hz.

**Power Consumption (each solenoid):**

ANSI Size 1: 10 VA inrush, 24 VA holding on 50 or 60 Hz; 5 watts on DC.

ANSI Size 2.5, 4, 10 & 20: 87 VA inrush, 55 VA holding on 50 or 60 Hz; 14 watts on DC.

**Ambient Temperature:** 40° to 120°F (4°C to 50°C).

**Media Temperature:** 40° to 175°F (4° to 80°C).

For other temperature ranges, consult ROSS.

**Flow Media:** Filtered air.

**Inlet Pressure:** Vacuum to 150 psig (10 bar).

**Pilot Pressure:**

ANSI Size 1 & 20: At least 30 psig (2 bar).

ANSI Size 2.5, 4 & 10: At least 15 psig (1 bar).


**Indicator Light:** ANSI Size 4, 10 & 20 models only.

**Manual Override:** Flush; rubber, non-locking.

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.



| 5-Way 2-Position Valves, Spring Return |           |                     |                     |                             |        |          |                |
|----------------------------------------|-----------|---------------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                              | Port Size | Valve Model Number* | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                        |           |                     |                     | M                           | F      |          |                |
|                                        |           |                     |                     |                             | In-Out | Out-Exh. |                |
| 1                                      | 1/4 - 3/8 | W7056B2331          | 1.0                 | 20                          | 3.6    | 4.9      | 2.5 (1.1)      |
| 2.5                                    | 3/8 - 1/2 | W7056A3331          | 2.5                 | 17                          | 1.5    | 2.6      | 2.0 (0.9)      |
| 4                                      | 3/8 - 3/4 | W7056B4331          | 4.2                 | 12                          | 0.6    | 0.7      | 4.3 (1.9)      |
| 10                                     | 3/4 - 1¼  | W7056A6331          | 10                  | 20                          | 0.3    | 0.3      | 6.3 (2.8)      |
| 20                                     | 1¼ - 1½   | W7056A8331          | 22                  | 30                          | 0.1    | 0.2      | 13.0 (5.9)     |




\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.

# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




A




## Valve Dimensions – inches (mm)


ANSI Size 1

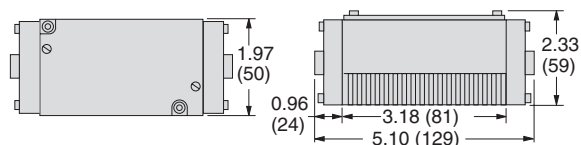


ANSI Size 2.5

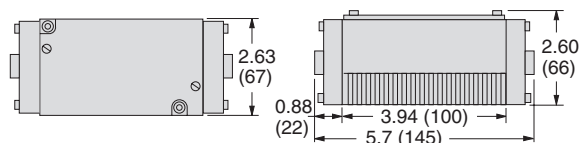


ANSI Size 4

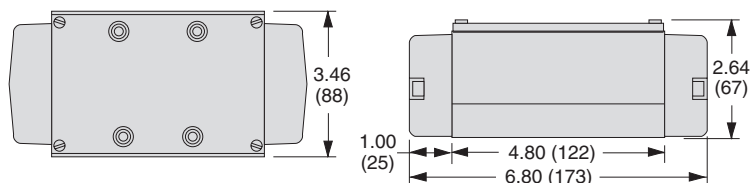

ANSI Size 10

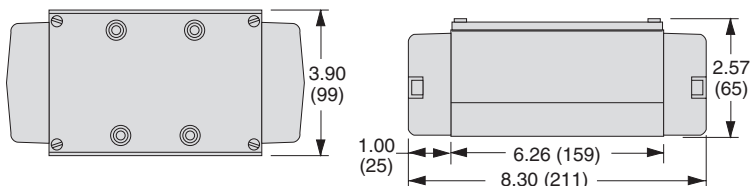

ANSI Size 20

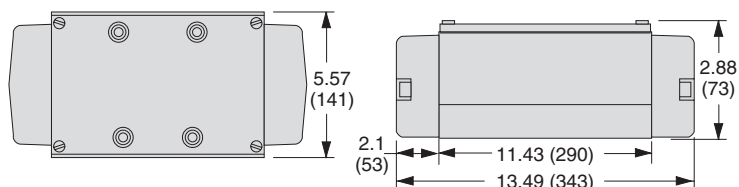

Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Spool and sleeve.

**Mounting Type:** Base.

**Ambient/Media Temperature:** 40° to 175°F (4° to 80°C).

For other temperature ranges, consult ROSS.

**Flow Media:** Filtered air.

**Inlet Pressure:** Vacuum to 150 psig (10 bar).

**Pilot Pressure:**

ANSI Size 1 & 20: At least 30 psig (2 bar).

ANSI Size 2.5, 4 & 10: At least 15 psig (1 bar).

Please read carefully and thoroughly all of the

on the inside back cover.



Online Version  
Rev. 11/14/16

# Double Pressure Controlled Valves


**ANSI  
W70 Series**

**A**

| 5-Way 2-Position Valves, Detented |           |                     |                     |                             |        |          |                |
|-----------------------------------|-----------|---------------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                         | Port Size | Valve Model Number* | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                   |           |                     |                     | M                           | F      |          |                |
|                                   |           |                     |                     |                             | In-Out | Out-Exh. |                |
| 1                                 | 1/4 - 3/8 | W7056B2332          | 1.0                 | 20                          | 3.5    | 4.9      | 2.5 (1.1)      |
| 2.5                               | 3/8 - 1/2 | W7056A3332          | 2.5                 | 17                          | 1.5    | 2.6      | 2.0 (0.9)      |
| 4                                 | 3/8 - 3/4 | W7056B4332          | 4.2                 | 12                          | 0.6    | 0.7      | 4.3 (1.9)      |
| 10                                | 3/4 - 1¼  | W705A6332           | 10                  | 20                          | 0.3    | 0.3      | 6.3 (2.8)      |
| 20                                | 1¼ - 1½   | W7056A8332          | 22                  | 30                          | 0.1    | 0.2      | 13.8 (6.2)     |


\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.

# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




## Valve Dimensions – inches (mm)


**ANSI Size 1**

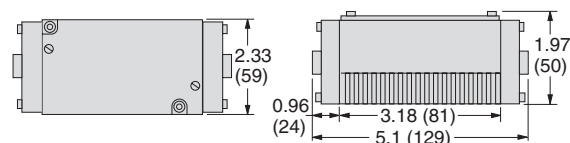


**ANSI Size 2.5**

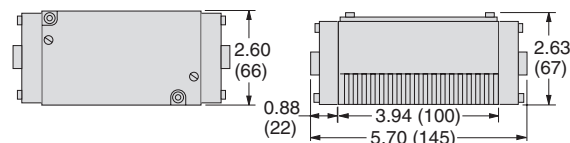


**ANSI Size 4**

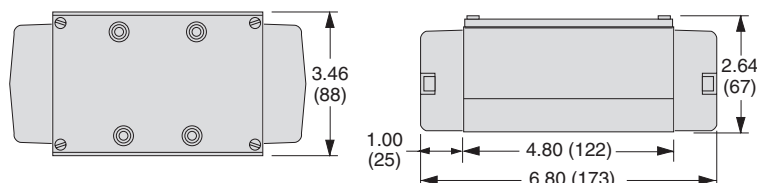

**ANSI Size 10**

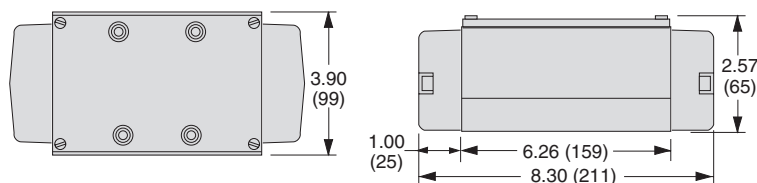

**ANSI Size 20**

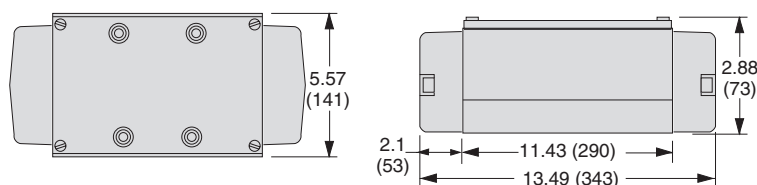

Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Spool and sleeve.

**Mounting Type:** Base.

**Ambient/Media Temperature::** 40° to 175°F (4° to 80°C).

For other temperature ranges, consult ROSS.

**Flow Media:** Filtered air.

**Inlet Pressure:** Vacuum to 150 psig (10 bar).

**Pilot Pressure:**

ANSI Size 1 & 20: At least 30 psig (2 bar).

ANSI Size 2.5, 4 & 10: At least 15 psig (1 bar).


**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

# Double Pressure Controlled Valves


## ANSI W70 Series

| 5-Way 3-Position Valves |              |                     |               |             |                        |                             |        |          |                   |
|-------------------------|--------------|---------------------|---------------|-------------|------------------------|-----------------------------|--------|----------|-------------------|
| ANSI<br>Size            | Port<br>Size | Valve Model Number* |               |             | Avg.<br>C <sub>v</sub> | Average Response Constants# |        |          | Weight<br>lb (kg) |
|                         |              | Power Center        | Closed Center | Open Center |                        | M                           | F      |          |                   |
|                         |              |                     |               |             |                        |                             | In-Out | Out-Exh. |                   |
| 1                       | 1/8 - 3/8    | —                   | W7057B2331    | W7057B2332  | 1.0                    | 20                          | 3.5    | 4.9      | 2.5 (1.1)         |
| 2.5                     | 3/8 - 1/2    | —                   | W7057A3331    | W7057A3332  | 2.5                    | 17                          | 1.5    | 2.6      | 2.0 (0.9)         |
| 4                       | 1/2 - 3/4    | —                   | W7057B4331    | W7057B4332  | 4.2                    | 12                          | 0.6    | 0.7      | 4.3 (1.9)         |
| 10                      | 3/4 - 1¼     | W7057A6902          | W7057A6331    | W7057A6332  | 10                     | 20                          | 0.3    | 0.3      | 6.3 (2.8)         |
| 20                      | 1¼ - 1½      | —                   | W7057A8331    | W7057A8332  | 22                     | 30                          | 0.1    | 0.2      | 13.8 (6.2)        |


Power Center



Closed Center



Open Center



\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.


# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




A

### Valve Dimensions – inches (mm)


ANSI Size 1

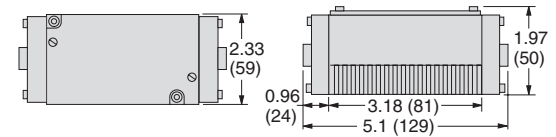


ANSI Size 2.5

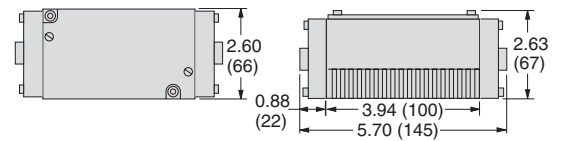


ANSI Size 4

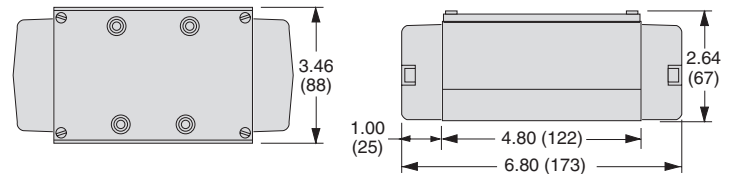

ANSI Size 10

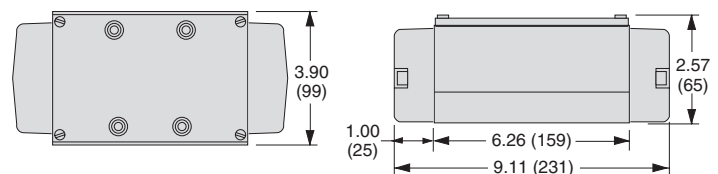

ANSI Size 20

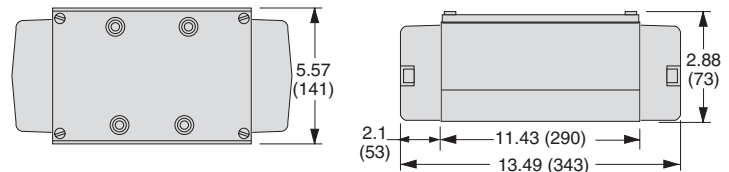

Accessories ordered separately, refer to page A5.19.

### STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Spool and sleeve.

**Mounting Type:** Base.

**Ambient/Media Temperature:** 40° to 175°F (4° to 80°C).

For other temperature ranges, consult ROSS.

**Flow Media:** Filtered air.

**Inlet Pressure:** Vacuum to 150 psig (10 bar).

**Pilot Pressure:**

ANSI Size 1 & 20: At least 30 psig (2 bar).

ANSI Size 2.5, 4 & 10: At least 15 psig (1 bar).

Please read carefully and thoroughly all of the

on the inside back cover.




Online Version  
Rev. 11/14/16

# Single Solenoid Pilot Controlled Valves

ANSI  
W74 Series

A

| 5-Way 2-Position Valves, Air Return |              |                     |              |                        |                             |        |          |                   |
|-------------------------------------|--------------|---------------------|--------------|------------------------|-----------------------------|--------|----------|-------------------|
| ANSI<br>Size                        | Port<br>Size | Valve Model Number* |              | Avg.<br>C <sub>v</sub> | Average Response Constants# |        |          | Weight<br>lb (kg) |
|                                     |              | Standard Temp.      | High Temp.   |                        | M                           | F      |          |                   |
|                                     |              |                     |              |                        |                             | In-Out | Out-Exh. |                   |
| 1                                   | 1/4 - 3/8    | W7476B2331**        | W7476B2336** | 0.9                    | 30                          | 2.7    | 5.6      | 3.0 (1.4)         |
| 2.5                                 | 3/8 - 1/2    | W7476A3331**        | W7476A3336** | 2.0                    | 25                          | 1.5    | 2.9      | 3.0 (1.4)         |
| 4                                   | 1/2 - 3/4    | W7476C4331**        | W7476C4336** | 4.2                    | 27                          | 0.6    | 1.0      | 5.0 (2.3)         |
| 10                                  | 3/4 - 1¼     | W7476A6331**        | W7476A6336** | 11                     | 30                          | 0.3    | 0.5      | 6.1 (2.8)         |
| 20                                  | 1¼ - 1½      | W7476A8331**        | W7476A8336** | 22                     | 50                          | 0.1    | 0.2      | 18.5 (8.3)        |



\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.


\*\* Insert voltage code: "W" = 24 volts DC; "Z" = 100-110/50, 100-130/60 volts AC/Hz; e.g., W7476B2331W.

For other voltages, consult ROSS.


# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

## Valve Dimensions – inches (mm)


### ANSI Size 1

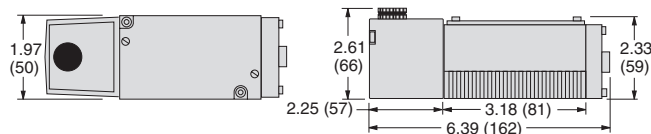


### ANSI Size 2.5

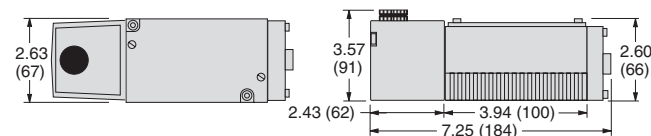


### ANSI Size 4

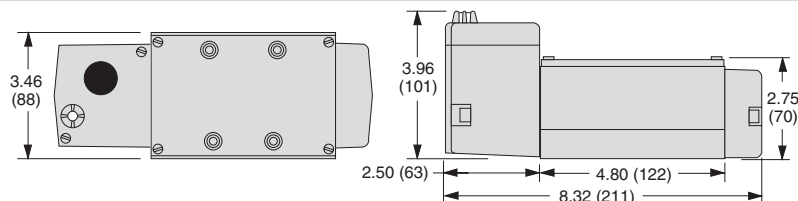

### ANSI Size 10

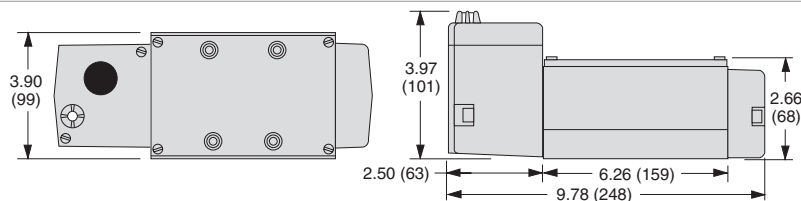

### ANSI Size 20

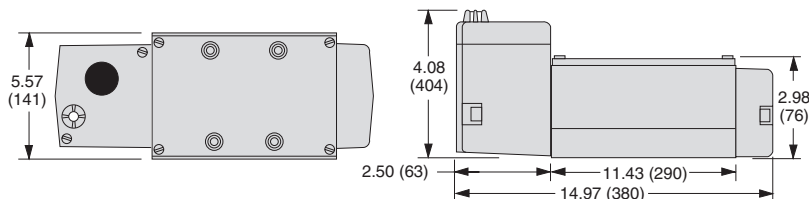

Options: Indicator Light (in Base/Manifold), refer to page A5.17-A5.18. Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Poppet.

**Mounting Type:** Base.

**Solenoid Pilot:** Rated for continuous duty.

**Standard Voltages:** 24 volts DC; 110/50, 110-120/60 volts AC/Hz.

**Power Consumption (each solenoid):**

ANSI Size 1: 10 VA inrush, 24 VA holding on 50 or 60 Hz; 5 watts on DC.

ANSI Size 2.5, 4, 10 & 20: 87 VA inrush, 55 VA holding on 50 or 60 Hz; 15 watts on DC.

**Ambient Temperature:** 40° to 120°F (4° to 50°C); extended to 175°F (80°C) for High Temperature models.

**Media Temperature:** 40° to 175°F (4° to 80°C); extended to 220°F (105°C) for High Temperature models.

**Flow Media:** Filtered air.

**Inlet Pressure:** 30 to 150 psig (2 to 10 bar).

**Pilot Pressure:** Must be equal to or greater than inlet pressure.

**Indicator Light:** ANSI Size 4, 10 & 20 models only: Included, one per solenoid.

**Manual Override:** Flush; rubber, non-locking.

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

# Double Solenoid Pilot Controlled Valves

ANSI  
W74 Series

| 5-Way 2-Position Valves, Double Solenoid Pilot Controlled, Detented |               |                     |              |                     |                             |        |          |                |  |
|---------------------------------------------------------------------|---------------|---------------------|--------------|---------------------|-----------------------------|--------|----------|----------------|--|
| ANSI Size                                                           | Port Size     | Valve Model Number* |              | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |  |
|                                                                     |               | Standard Temp.      | High Temp.   |                     | M                           | F      |          |                |  |
|                                                                     |               |                     |              |                     |                             | In-Out | Out-Exh. |                |  |
| 1                                                                   | 1/4 - 3/8     | W7476B2332**        | W7476B2337** | 0.9                 | 30                          | 2.7    | 5.6      | 3.0 (1.4)      |  |
| 2.5                                                                 | 3/8 - 1/2     | W7476A3332**        | W7476A3337** | 2.0                 | 25                          | 1.5    | 2.9      | 3.0 (1.4)      |  |
| 4                                                                   | 1/2 - 3/4     | W7476C4332**        | W7476C4337** | 4.2                 | 27                          | 0.6    | 1.0      | 5.0 (2.3)      |  |
| 10                                                                  | 3/4 - 1 1/4   | W7476A6332**        | W7476A6337** | 11                  | 30                          | 0.3    | 0.5      | 6.1 (2.8)      |  |
| 20                                                                  | 1 1/4 - 1 1/2 | W7476A8332**        | W7476A8337** | 22                  | 50                          | 0.1    | 0.2      | 18.5 (8.3)     |  |

\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.


\*\* Insert voltage code: “W” = 24 volts DC; “Z” = 100-110/50, 100-130/60 volts AC/Hz; e.g., W7476B2332W.

For other voltages, consult ROSS.

# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




A




## Valve Dimensions – inches (mm)


### ANSI Size 1

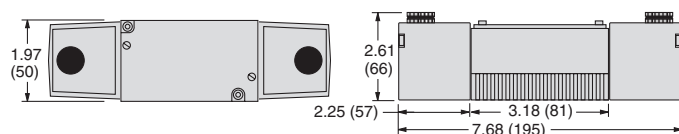


### ANSI Size 2.5

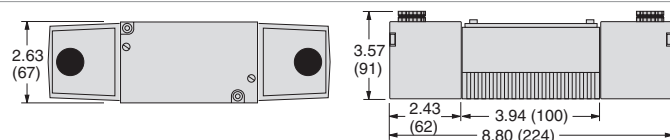


### ANSI Size 4

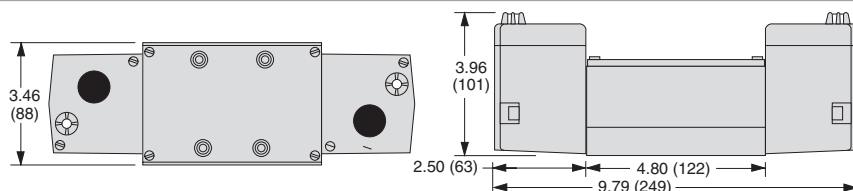

### ANSI Size 10

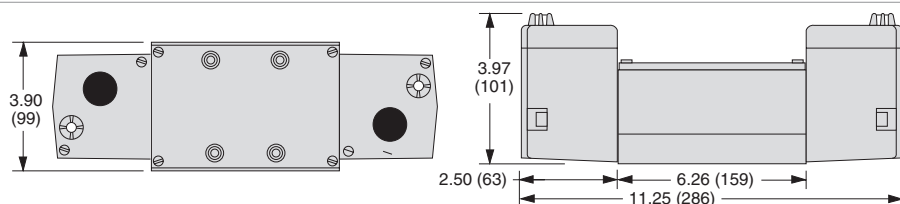

### ANSI Size 20

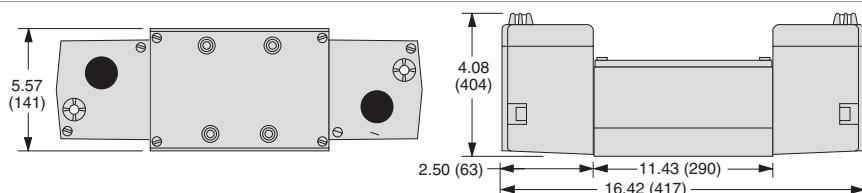

Options: Indicator Light (in Base/Manifold), refer to page A5.17-A5.18. Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Poppet.

**Mounting Type:** Base.

**Solenoid Pilot:** Rated for continuous duty.

**Standard Voltages:** 24 volts DC; 110/50, 110-120/60 volts AC/Hz.

**Power Consumption (each solenoid):**

ANSI Size 1: 10 VA inrush, 24 VA holding on 50 or 60 Hz; 5 watts on DC.

ANSI Size 2.5, 4, 10 & 20: 87 VA inrush, 55 VA holding on 50 or 60 Hz; 15 watts on DC.

**Ambient Temperature:** 40° to 120°F (4° to 50°C); extended to 175°F (80°C) for High Temperature models.

**Media Temperature:** 40° to 175°F (4° to 80°C); extended to 220°F (105°C) for High Temperature models.

**Flow Media:** Filtered air.

**Inlet Pressure:** 30 to 150 psig (2 to 10 bar).

**Pilot Pressure:** Must be equal to or greater than inlet pressure.

**Indicator Light:** ANSI Size 4, 10 & 20 models only: Included, one per solenoid.

**Manual Override:** Flush; rubber, non-locking.

Please read carefully and thoroughly all of the

on the inside back cover.



Online Version  
Rev. 11/14/16

A5.11

# Single Pressure Controlled Valves


ANSI  
W74 Series

A

| 5-Way 2-Position Valves, Air Return |           |                     |            |                     |                             |        |          |                |
|-------------------------------------|-----------|---------------------|------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                           | Port Size | Valve Model Number* |            | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                     |           | Standard Temp.      | High Temp. |                     | M                           | F      |          |                |
|                                     |           |                     |            |                     |                             | In-Out | Out-Exh. |                |
| 1                                   | 1/4 - 3/8 | W7456B2331          | W7456B2336 | 0.9                 | 30                          | 2.7    | 5.6      | 2.5 (1.1)      |
| 2.5                                 | 3/8 - 1/2 | W7456A3331          | W7456A3336 | 2.0                 | 25                          | 1.4    | 2.9      | 2.0 (0.9)      |
| 4                                   | 1/2 - 3/4 | W7456C4331          | W7456C4336 | 4.2                 | 16                          | 0.5    | 1.1      | 3.3 (1.5)      |
| 10                                  | 3/4 - 1¼  | W7456A6331          | W7456A6336 | 11                  | 14                          | 0.3    | 0.5      | 7.3 (3.3)      |
| 20                                  | 1¼ - 1½   | W7456A8331          | W7456A8336 | 22                  | 32                          | 0.1    | 0.2      | 17.5 (7.9)     |


\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.

# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




## Valve Dimensions – inches (mm)


ANSI Size 1

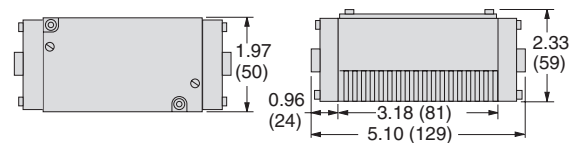


ANSI Size 2.5

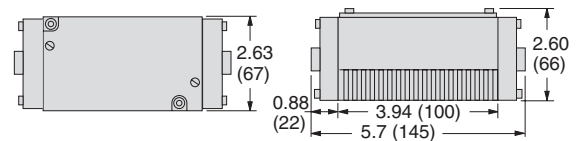


ANSI Size 4

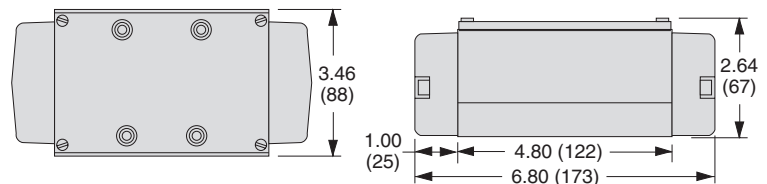

ANSI Size 10

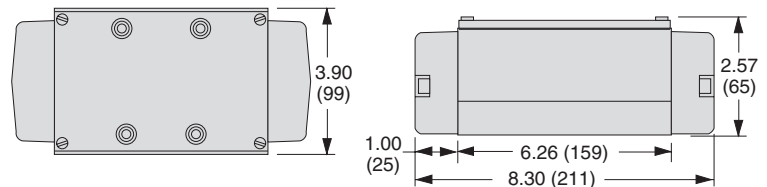

ANSI Size 20

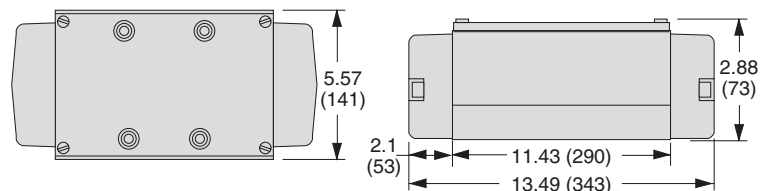

Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Poppet.

**Mounting Type:** Base.

**Ambient Temperature:** 40° to 175°F (4° to 80°C).

**Media Temperature:** 40° to 175°F (4° to 80°C); extended to 220°F (105°C)

for High Temperature models.

**Flow Media:** Filtered air.

**Inlet Pressure:** 30 to 150 psig (2 to 10 bar).

**Pilot Pressure:** Must be equal to or greater than inlet pressure.


**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

A5

# Double Pressure Controlled Valves

ANSI  
W74 Series

| 5-Way 2-Position Valves, Detented |           |                     |            |                     |                             |        |          |                |
|-----------------------------------|-----------|---------------------|------------|---------------------|-----------------------------|--------|----------|----------------|
| ANSI Size                         | Port Size | Valve Model Number* |            | Avg. C <sub>v</sub> | Average Response Constants# |        |          | Weight lb (kg) |
|                                   |           | Standard Temp.      | High Temp. |                     | M                           | F      |          |                |
|                                   |           |                     |            |                     |                             | In-Out | Out-Exh. |                |
| 1                                 | 1/4 - 3/8 | W7456B2332          | W7456B2337 | 0.9                 | 30                          | 2.7    | 5.6      | 2.5 (1.1)      |
| 2.5                               | 3/8 - 1/2 | W7456A3332          | W7456A3337 | 2.0                 | 25                          | 1.4    | 2.9      | 2.0 (0.9)      |
| 4                                 | 1/2 - 3/4 | W7456C4332          | W7456C4337 | 4.2                 | 16                          | 0.5    | 1.1      | 3.3 (1.5)      |
| 10                                | 3/4 - 1¼  | W7456A6332          | W7456A6337 | 11                  | 14                          | 0.3    | 0.5      | 7.3 (3.3)      |
| 20                                | 1¼ - 1½   | W7456A8332          | W7456A8337 | 22                  | 32                          | 0.1    | 0.2      | 17.5 (7.9)     |




\* Sub-bases and sub-base manifolds ordered separately, refer to page A5.14-A5.18.

# Valve Response Time – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.




A




## Valve Dimensions – inches (mm)


ANSI Size 1

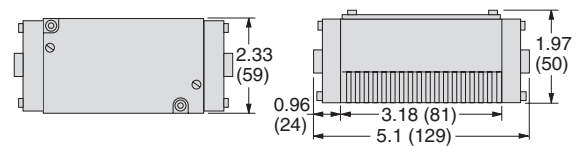


ANSI Size 2.5

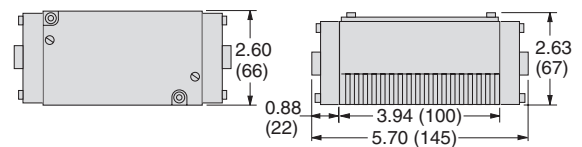


ANSI Size 4

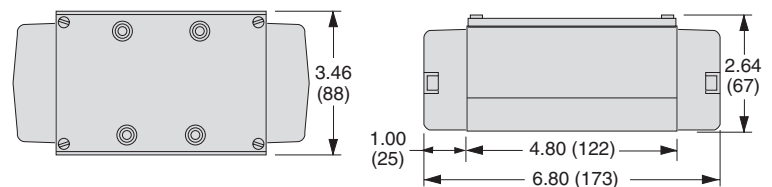

ANSI Size 10

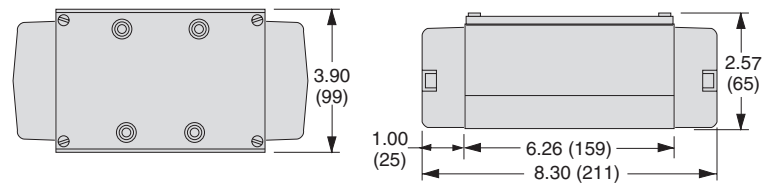

ANSI Size 20

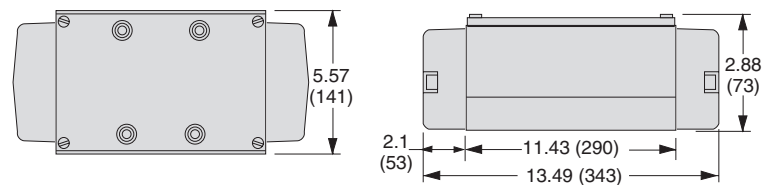

Accessories ordered separately, refer to page A5.19.

## STANDARD SPECIFICATIONS (for valves on this page):

**Construction:** Poppet.

**Mounting Type:** Base.

**Ambient Temperature:** 40° to 175°F (4° to 80°C).

**Media Temperature:** 40° to 175°F (4° to 80°C); extended to 220°F (105°C)

for High Temperature models.

**Flow Media:** Filtered air.

**Inlet Pressure:** 30 to 150 psig (2 to 10 bar).

**Pilot Pressure:** Must be equal to or greater than inlet pressure.

Please read carefully and thoroughly all of the

on the inside back cover.



Online Version  
Rev. 11/14/16

A5.13

# Sub-Bases – Side Ported For Solenoid Pilot Controlled Valves

for ANSI Valves  
W70 & W74 Series

A



Sub-base for ANSI Size 4 valve illustrated


The sub-base numbers shown in the chart on the right specify pressure ports with NPT threads, and electrical openings with 1/2 NPT threads.

| ANSI Size | Outlet Port | Indicator Lights in Base* |          |          | Avg. C <sub>v</sub> |
|-----------|-------------|---------------------------|----------|----------|---------------------|
|           |             | None                      | One      | Two      |                     |
|           |             | Model Number              |          |          |                     |
| 1         | 1/4         | 500B91                    | 525K91** | 526K91** | 0.9 to 1.0          |
|           | 3/8         | 501B91                    | 527K91** | 528K91** | 0.9 to 1.0          |
| 2.5       | 3/8         | 474K91                    | 482K91** | 484K91** | 2.0 to 2.5          |
|           | 1/2         | 475K91                    | 483K91** | 485K91** | 2.0 to 2.5          |
| 4         | 3/8         | 361B91                    | —        | —        | 4.2                 |
|           | 1/2         | 362B91                    | —        | —        | 4.2                 |
|           | 3/4         | 363B91                    | —        | —        | 4.2                 |
| 10        | 3/4         | 364B91                    | —        | —        | 10 to 11            |
|           | 1           | 365B91                    | —        | —        | 10 to 11            |
|           | 1¼          | 366B91                    | —        | —        | 10 to 11            |
| 20        | 1¼          | 367B91                    | —        | —        | 22                  |
|           | 1½          | 368B91                    | —        | —        | 22                  |

\*NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D502B91  
\*\* Insert voltage code: "–W" = 24 volts DC; "–Z" = 110-120 volts AC, 50/60 Hz; e.g., 525K91–W. For other voltages, consult ROSS.


A5

ANSI Size 1 & 2.5

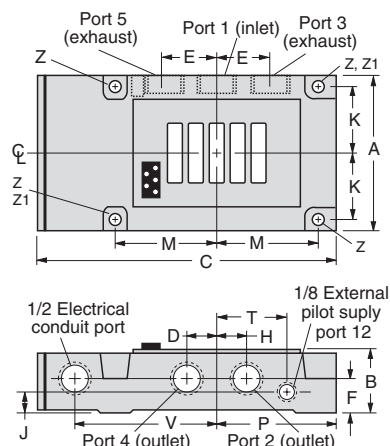

| Sub-Base Dimensions inches (mm) |            |            |            |             |             |
|---------------------------------|------------|------------|------------|-------------|-------------|
|                                 | ANSI 1     | ANSI 2.5   | ANSI 4     | ANSI 10     | ANSI 20     |
| A                               | 2.80 (71)  | 3.56 (90)  | 3.36 (85)  | 5.08 (129)  | 6.64 (169)  |
| B                               | 1.44 (37)  | 1.61 (41)  | 2.64 (67)  | 3.78 (96)   | 3.70 (94)   |
| C                               | 6.15 (156) | 7.09 (180) | 7.21 (183) | 10.45 (266) | 12.34 (313) |
| D                               | 0.51 (13)  | 0.63 (16)  | 0.75 (19)  | 1.38 (35)   | 1.38 (35)   |
| E                               | 0.88 (22)  | 1.25 (32)  | 1.50 (38)  | 2.76 (70)   | 2.76 (70)   |
| F                               | 0.78 (20)  | 0.93 (23)  | 1.23 (31)  | 1.75 (44)   | 1.59 (40)   |
| H                               | 0.58 (15)  | 0.63 (16)  | 2.21 (56)  | 3.01 (76)   | 2.85 (72)   |
| J                               | 0.38 (10)  | 0.50 (13)  | —          | —           | —           |
| K                               | 1.13 (29)  | 1.50 (38)  | —          | 2.05 (52)   | 2.38 (60)   |
| M                               | 1.88 (48)  | 2.31 (59)  | —          | 4.33 (110)  | 5.35 (136)  |
| P                               | 2.43 (62)  | 2.97 (75)  | 2.86 (73)  | 4.76 (121)  | 5.86 (149)  |
| S                               | —          | —          | 2.36 (60)  | —           | —           |
| T                               | 1.35 (34)  | 1.78 (45)  | —          | —           | —           |
| U                               | —          | —          | 0.83 (21)  | 1.97 (50)   | 1.54 (39)   |
| V                               | 2.75 (70)  | 3.29 (83)  | 3.07 (78)  | 4.65 (118)  | 5.60 (142)  |
| W                               | —          | —          | 1.23 (31)  | 2.50 (64)   | 2.15 (55)   |
| Z                               | 0.27 (7)   | —          | 0.30 (7)   | —           | —           |
| Z1                              | —          | 0.28 (7)   | —          | 0.34 (9)    | 0.37 (9)    |

ANSI Size 4, 10 & 20

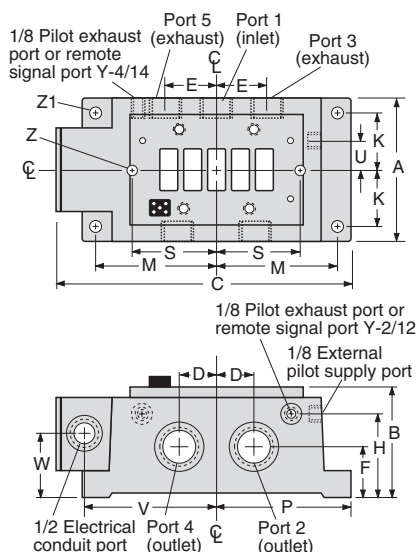

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

# Sub-Bases – Side Ported For Pressure Controlled Valves

# for ANSI Valves W70 & W74 Series

A




Sub-base for ANSI Size 4  
valve illustrated


| ANSI Size | Outlet Port | Model Number | Avg. C <sub>v</sub> |
|-----------|-------------|--------------|---------------------|
| 1         | 1/4         | 500B91       | 0.9 to 1.0          |
|           | 3/8         | 501B91       | 0.9 to 1.0          |
| 2.5       | 3/8         | 474K91       | 2.0 to 2.5          |
|           | 1/2         | 475K91       | 2.0 to 2.5          |
| 4         | 3/8         | 361B91       | 4.2                 |
|           | 1/2         | 362B91       | 4.2                 |
|           | 3/4         | 363B91       | 4.2                 |
| 10        | 3/4         | 364B91       | 10 to 11            |
|           | 1           | 365B91       | 10 to 11            |
|           | 1 1/4       | 366B91       | 10 to 11            |
| 20        | 1 1/4       | 367B91       | 22                  |
|           | 1 1/2       | 368B91       | 22                  |

\*NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D502B91.

ANSI Size 1 & 2.5

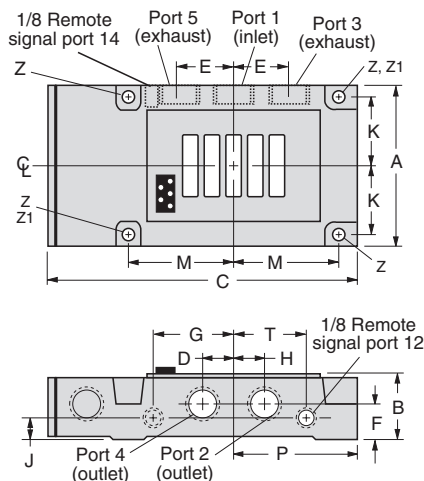

ANSI Size 4, 10 & 20

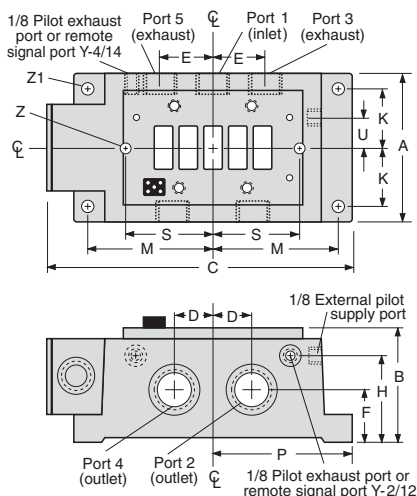

A5

| Sub-Base Dimensions inches (mm) |            |            |            |             |             |
|---------------------------------|------------|------------|------------|-------------|-------------|
|                                 | ANSI 1     | ANSI 2.5   | ANSI 4     | ANSI 10     | ANSI 20     |
| A                               | 2.80 (71)  | 3.56 (90)  | 3.36 (85)  | 5.08 (129)  | 6.64 (169)  |
| B                               | 1.44 (37)  | 1.61 (41)  | 2.64 (67)  | 3.78 (96)   | 3.70 (94)   |
| C                               | 6.15 (156) | 7.09 (180) | 7.21 (183) | 10.45 (266) | 12.34 (313) |
| D                               | 0.51 (13)  | 0.63 (16)  | 0.75 (19)  | 1.38 (35)   | 1.38 (35)   |
| E                               | 0.88 (22)  | 1.25 (32)  | 1.50 (38)  | 2.76 (70)   | 2.76 (70)   |
| F                               | 0.78 (20)  | 0.93 (23)  | 1.23 (31)  | 1.75 (44)   | 1.59 (40)   |
| H                               | 0.58 (15)  | 0.63 (16)  | 2.21 (56)  | 3.01 (76)   | 2.85 (72)   |
| J                               | 0.38 (10)  | 0.50 (13)  | —          | —           | —           |
| K                               | 1.13 (29)  | 1.50 (38)  | —          | 2.05 (52)   | 2.38 (60)   |
| M                               | 1.88 (48)  | 2.31 (59)  | —          | 4.33 (110)  | 5.35 (136)  |
| P                               | 2.43 (62)  | 2.97 (75)  | 2.86 (73)  | 4.76 (121)  | 5.86 (149)  |
| S                               | —          | —          | 2.36 (60)  | —           | —           |
| T                               | 1.35 (34)  | 1.78 (45)  | —          | —           | —           |
| U                               | —          | —          | 0.83 (21)  | 1.97 (50)   | 1.54 (39)   |
| V                               | —          | —          | —          | —           | —           |
| Z                               | 0.27 (7)   | —          | 0.30 (7)   | —           | —           |
| Z1                              | —          | 0.28 (7)   | —          | 0.34 (9)    | 0.37 (9)    |

# Sub-Bases – Side & Bottom Ported For Solenoid Pilot or Pressure Controlled Valves

for ANSI Valves  
W70 & W74 Series

A

## Side & Bottom Ported Sub-Bases

| ANSI Size | Outlet Port | Indicator Lights in Base* |          |          | Avg. C <sub>v</sub> |
|-----------|-------------|---------------------------|----------|----------|---------------------|
|           |             | None                      | One      | Two      |                     |
|           |             | Model Number              |          |          |                     |
| 1         | 1/4         | 499B91                    | 529K91** | 530K91** | 0.9 to 1.0          |
| 2.5       | 3/8         | 476K91                    | 477K91** | 486K91** | 2.0 to 2.5          |
| 4         | 3/8         | 369B91                    | —        | —        | 4.2                 |
|           | 1/2         | 370B91                    | —        | —        | 4.2                 |
|           | 3/4         | 371B91                    | —        | —        | 4.2                 |




\*NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D502B91.

\*\* Insert voltage code: "-W" = 24 volts DC; "-Z" = 110-120 volts AC, 50/60 Hz; e.g., 529K91-W. For other voltages, consult ROSS.




### Sub-Base Dimensions inches (mm)

|    | ANSI 1     | ANSI 2.5   | ANSI 4     |
|----|------------|------------|------------|
| A  | 2.80 (71)  | 3.56 (90)  | 3.36 (85)  |
| B  | 1.44 (37)  | 1.61 (41)  | 2.64 (67)  |
| C  | 6.15 (156) | 7.09 (180) | 7.21 (183) |
| D  | 0.51 (13)  | 0.63 (16)  | 0.75 (19)  |
| E  | 0.88 (22)  | 1.25 (32)  | 1.50 (38)  |
| F  | 0.78 (20)  | 0.93 (23)  | 1.23 (31)  |
| G  | 1.46 (37)  | 2.41 (61)  | —          |
| H  | 0.58 (15)  | 0.63 (16)  | 2.21 (56)  |
| J  | 0.38 (10)  | 0.50 (13)  | —          |
| K  | 1.13 (29)  | 1.50 (38)  | —          |
| L  | 0.63 (16)  | 0.81 (21)  | —          |
| M  | 1.88 (48)  | 2.31 (59)  | —          |
| P  | 2.43 (62)  | 2.97 (75)  | 2.86 (73)  |
| S  | —          | —          | 2.36 (60)  |
| T  | 1.35 (34)  | 1.78 (45)  | —          |
| U  | —          | —          | 0.83 (21)  |
| V  | 2.75 (70)  | 3.29 (83)  | —          |
| Z  | 0.27 (7)   | —          | 0.30 (7)   |
| Z1 | —          | 0.28 (7)   | —          |

### ANSI Size 1 & 2.5

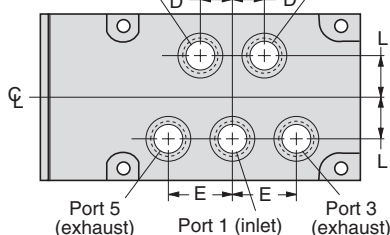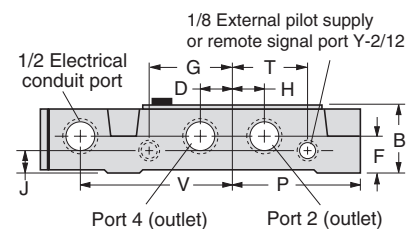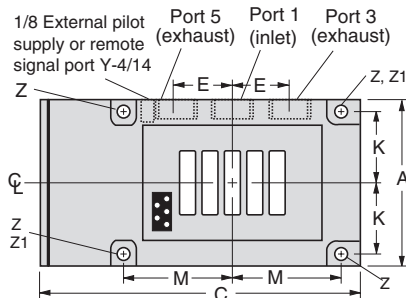

### ANSI Size 4

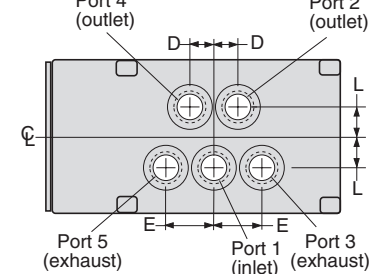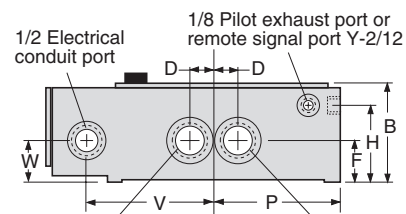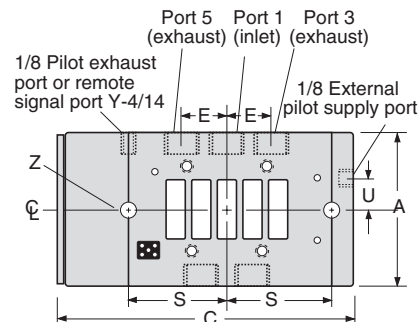

A5





## Bottom Ported Sub-Bases

| ANSI Size | Outlet Port | Model Number | Avg. C <sub>v</sub> |
|-----------|-------------|--------------|---------------------|
| 10        | 3/4         | 372B91       | 10 to 11            |
|           | 1           | 373B91       | 10 to 11            |
|           | 1 1/4       | 374B91       | 10 to 11            |
| 20        | 1 1/4       | 375B91       | 22                  |
|           | 1 1/2       | 376B91       | 22                  |

\*NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D502B91.

### Dimensions inches (mm)


|   | ANSI 10     | ANSI 20     |   | ANSI 10    | ANSI 20    |
|---|-------------|-------------|---|------------|------------|
| A | 5.8 (129)   | 6.64 (169)  | K | 2.05 (52)  | 2.38 (60)  |
| B | 3.78 (96)   | 3.70 (94)   | L | 1.22 (31)  | 1.22 (31)  |
| C | 10.45 (266) | 12.34 (313) | M | 4.33 (110) | 5.36 (136) |
| D | 1.38 (35)   | 1.38 (35)   | N | 0.88 (22)  | 1.00 (25)  |
| E | 2.76 (70)   | 2.76 (76)   | P | 4.76 (121) | 5.82 (148) |
| F | 1.03 (26)   | 1.54 (39)   | R | 4.65 (118) | 5.60 (142) |
| G | 2.60 (66)   | 3.90 (99)   | T | 2.50 (64)  | 2.15 (55)  |
| H | 3.01 (76)   | 2.85 (72)   | Z | 0.34 (8)   | 0.37 (9)   |
| J | 3.25 (83)   | 2.85 (72)   |   |            |            |

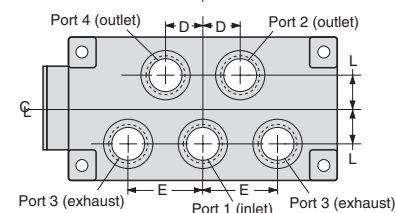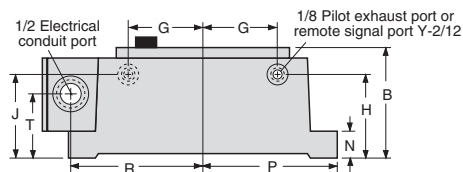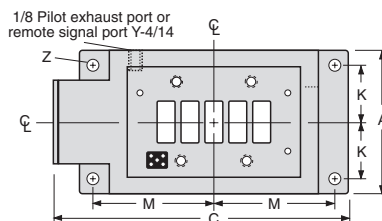

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

# Manifolds For Solenoid Pilot Controlled Valves

# for ANSI Valves W70 & W74 Series




Typical Manifold Station

The numbers of the manifold stations shown in the chart on the right specify pressure ports with NPT threads and electrical openings with 1/4 NPT threads. All necessary hardware and seals for manifold assembly are included with each manifold station.

As shown in the chart the smaller sizes of manifolds are available with indicator lights. These lights are located in the end plate covering the electrical cavity.

Lights are mounted in bases, on the valves, or on solenoids, depending on the particular type of valve.



**Manifold Note:** The port positions of the solenoid controlled and the pressure controlled manifolds are not the same. For this reason these stations cannot be mixed in the same installation. If both types of valves *must* be used in the same installation, *use only manifold stations for solenoid controlled valves.*

| ANSI Size | Outlet Port | Indicator Lights in Manifold* |          |          | Avg. C <sub>v</sub> |
|-----------|-------------|-------------------------------|----------|----------|---------------------|
|           |             | None                          | One      | Two      |                     |
|           |             | Model Number                  |          |          |                     |
| 1         | 1/4         | 502B91                        | 531K91** | 532K91** | 0.9 to 1.0          |
|           | 3/8         | 503B91                        | 533K91** | 534K91** | 0.9 to 1.0          |
| 2.5       | 3/8         | 472K91                        | 478K91** | 480K91** | 2.0 to 2.5          |
|           | 1/2         | 473K91                        | 479K91** | 481K91** | 2.0 to 2.5          |
| 4         | 3/8         | 377B91                        | —        | —        | 4.2                 |
|           | 1/2         | 378B91                        | —        | —        | 4.2                 |
|           | 3/4         | 379B91                        | —        | —        | 4.2                 |
| 10        | 3/4         | 380B91                        | —        | —        | 10 to 11            |
|           | 1           | 381B91                        | —        | —        | 10 to 11            |
|           | 1¼          | 382B91                        | —        | —        | 10 to 11            |

\*NPT port threads. For BSPP threads, add a “D” prefix to the model number, e.g., D502B91.

\*\* Insert voltage code: “-W” = 24 volts DC; “-Z” = 110-120 volts AC, 50/60 Hz; e.g., 531K91-W. For other voltages, consult ROSS.


\*NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D502B91.

\*\* Insert voltage code: "-W" = 24 volts DC; "-Z" = 110-120 volts AC, 50/60 Hz; e.g., 531K91-W. For other voltages, consult ROSS.


## Manifold Dimensions – inches (mm)

### ANSI Size 1 & 2.5


|   | Dimensions inches (mm) |            |        |           |
|---|------------------------|------------|--------|-----------|
|   | ANSI 1                 | ANSI 2.5   | ANSI 1 | ANSI 2.5  |
| A | 2.26 (57)              | 2.80 (71)  | L      | 1.62 (41) |
| B | 2.26 (57)              | 2.66 (68)  | M      | 1.00 (25) |
| C | 7.89 (201)             | 8.50 (216) | N      | 2.88 (73) |
| D | 1.38 (35)              | 1.48 (38)  | P      | 2.16 (55) |
| E | 0.56 (14)              | 0.70 (18)  | R      | 1.17 (30) |
| F | 2.76 (70)              | 2.99 (76)  | S      | 0.64 (16) |
| G | 3.14 (80)              | 3.43 (87)  | T      | 1.07 (27) |
| H | 1.80 (46)              | 2.24 (57)  | U      | 1.76 (45) |
| J | 0.50 (13)              | —          | Z      | 0.28 (7)  |
| K | 0.31 (8)               | 0.18 (6)   | Z1     | —         |

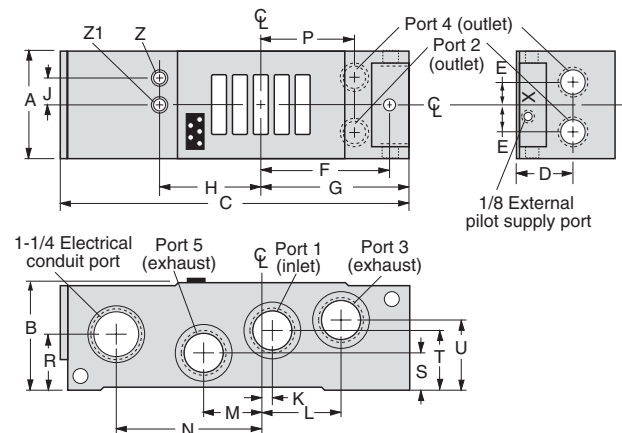

### ANSI Size 4

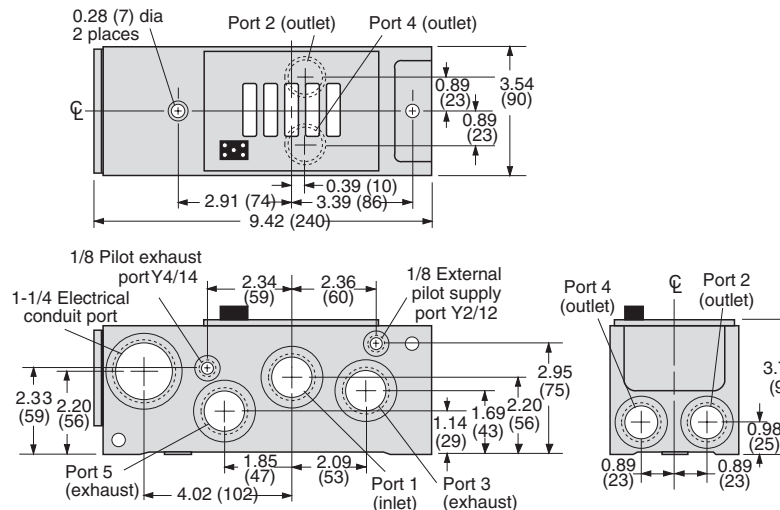

### ANSI Size 10

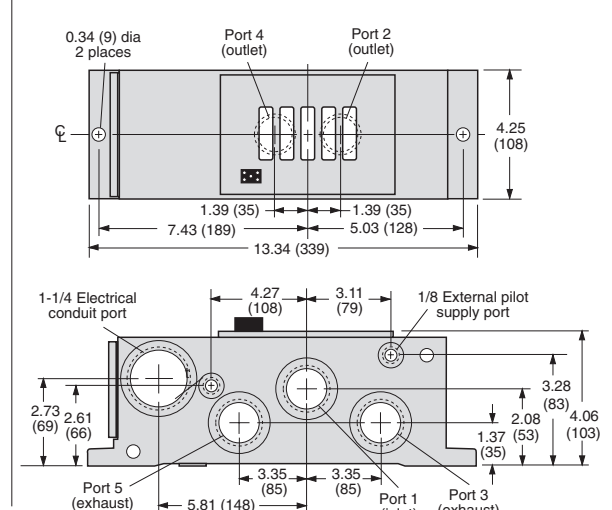

## ASSEMBLED MANIFOLDS

Valves and manifold stations can be assembled by ROSS to precise specifications.

The assembly is then ready for integration into your system.

For detailed information about such assemblies, consult your ROSS Distributor or call ROSS in the U.S.A. at 1-888-TEK-ROSS (835-7677) or 1-706-356-3708.

Please read carefully and thoroughly all of the

on the inside back cover.




Online Version  
Rev. 11/14/16

# Manifolds For Pressure Controlled Valves

# for ANSI Valves W70 & W74 Series

A

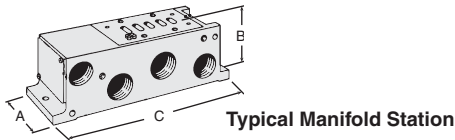

The numbers of the manifold stations shown in the chart on the right specify pressure ports with NPT threads. All necessary hardware and seals for manifold assembly are included with each manifold station.

**Manifold Note:** The port positions of the solenoid controlled and the pressure controlled manifolds are not the same. For this reason these stations cannot be mixed in the same installation. If both types of valves *must* be used in the same installation, use only manifold stations for solenoid controlled valves.


| ANSI Size | Outlet Port | Model Number | Avg. C <sub>v</sub> |
|-----------|-------------|--------------|---------------------|
| 1         | 1/4         | 359B91       | 0.9 to 1.0          |
|           | 3/8         | 360B91       | 0.9 to 1.0          |
| 2.5       | 3/8         | 468B91       | 2.0 to 2.5          |
|           | 1/2         | 469B91       | 2.0 to 2.5          |
| 4         | 3/8         | 383B91       | 4.2                 |
|           | 1/2         | 384B91       | 4.2                 |
|           | 3/4         | 385B91       | 4.2                 |
| 10        | 3/4         | 386B91       | 10 to 11            |
|           | 1           | 387B91       | 10 to 11            |
|           | 1 1/4       | 388B91       | 10 to 11            |

\*NPT port threads. For BSPP threads, add a "D" prefix to the model number, e.g., D502B91.


## Manifold Dimensions – inches (mm)

### ANSI Size 1 & 2.5


|   | Dimensions inches (mm) |            |        |           |
|---|------------------------|------------|--------|-----------|
|   | ANSI 1                 | ANSI 2.5   | ANSI 1 | ANSI 2.5  |
| A | 2.26 (57)              | 2.80 (71)  | L      | 1.47 (37) |
| B | 2.26 (57)              | 2.66 (68)  | M      | 1.36 (35) |
| C | 6.25 (159)             | 6.86 (174) | N      | 0.56 (14) |
| D | 1.32 (34)              | 1.48 (38)  | P      | 2.37 (60) |
| E | 0.56 (14)              | 0.70 (18)  | R      | 2.50 (64) |
| F | 2.88 (73)              | 2.99 (76)  | S      | 1.14 (29) |
| G | 3.31 (84)              | 3.40 (86)  | T      | 1.14 (29) |
| H | 0.56 (14)              | 0.74 (19)  | U      | 1.26 (32) |
| J | 0.88 (22)              | 1.26 (32)  | Z      | 0.28 (7)  |
| K | 0.00 (00)              | 0.18 (6)   |        |           |

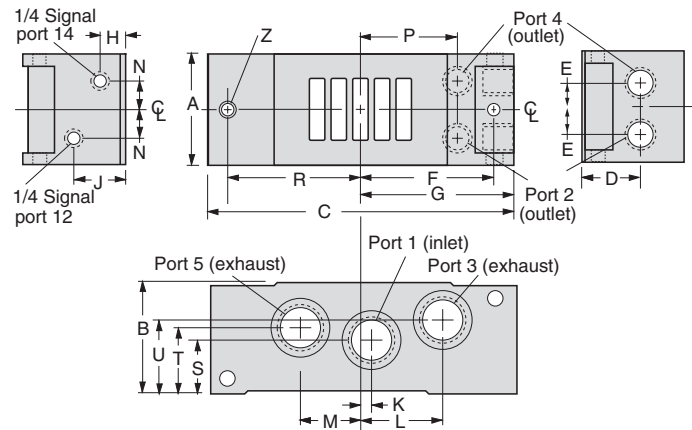

### ANSI Size 4

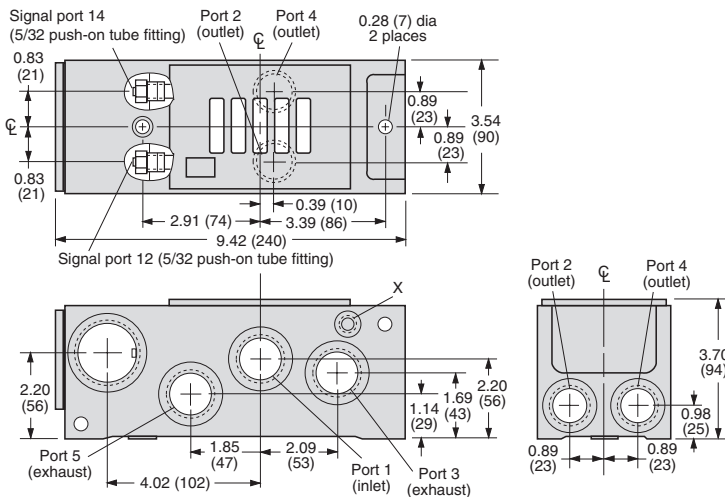

### ANSI Size 10

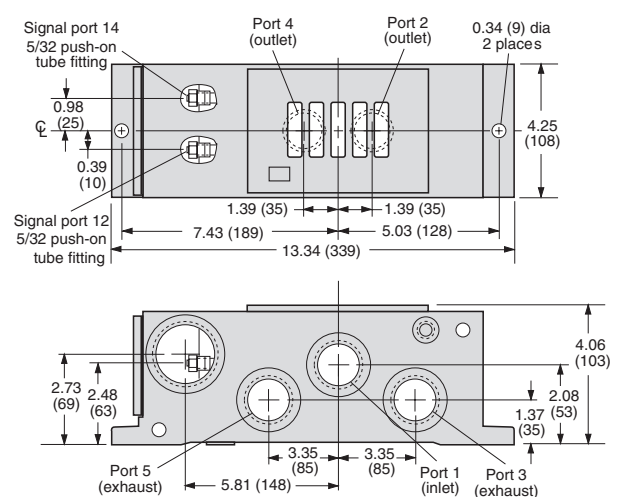

## ASSEMBLED MANIFOLDS

Valves and manifold stations can be assembled by ROSS to precise specifications.

The assembly is then ready for integration into your system.

For detailed information about such assemblies, consult your ROSS Distributor or call ROSS in the U.S.A. at 1-888-TEK-ROSS (835-7677) or 1-706-356-3708.

**IMPORTANT NOTE:** Please read carefully and thoroughly all of the **CAUTIONS, WARNINGS** on the inside back cover.

## Interposed Pressure Regulators

Both single and double interposed regulators are available for valves with  $C_v$  ratings up to 4.2. A regulator is bolted to the valve's sub-base or manifold station, and the valve is then bolted to the regulator. This mounting method allows the valve to be removed and replaced without disturbing the regulator.

Single pressure regulators provide the same regulated pressure at both outlet ports. Double pressure regulators allow the pressure at each outlet port to be set independently.

A locking type knob is used to set the regulated pressure at any point in the range of:

- 5 to 100 psig (0.3 to 7 bar) for size 1 and 2 models;
- 5 to 125 psig (0.3 to 8.5 bar) for size = 4.2 models.

Maximum inlet pressure is 150 psig (10 bar).

Pressure gauge(s) included.

| ANSI Size | Interposed Regulator – Model Number |          |            |
|-----------|-------------------------------------|----------|------------|
|           | Single                              | Double*  |            |
|           |                                     | Solenoid | Remote Air |
| 1         | 840C91                              | 841C91   | 713C91     |
| 2.5       | 626C91                              | 627C91   | 714C91     |
| 4         | 632C91                              | 633C91   | 715C91     |

\* Double regulator only for W70 spool valves.

**WARNING:**


Double interposed regulators will reverse output ports - the 12 solenoid will pressurize the 4 port, the 14 solenoid will pressurize the 2 port - which may cause unexpected, potentially dangerous cylinder movement at valve pressurization.

## Manual Override Kits

Flush flexible manual overrides are standard on solenoid pilot controlled valves with  $C_v$  ratings of 2.0 or larger. Both locking and non-locking metal override buttons are also available for these models.

Each of the override buttons in the kits at the right is made of metal and is spring-returned. The locking type button, however, can be kept in the actuated position by turning the slot in the top of the button with a screwdriver.

| Flush Button |            |  |
|--------------|------------|-------------------------------------------------------------------------------------|
| Locking Type | Kit Number |                                                                                     |
| Non-Locking  | 790K87     |                                                                                     |
| Locking      | 792K87     |                                                                                     |


| Extended Button |            |  |
|-----------------|------------|--------------------------------------------------------------------------------------|
| Locking Type    | Kit Number |                                                                                      |
| Non-Locking     | 791K87     |                                                                                      |

| Extended Button with Palm |            |  |
|---------------------------|------------|---------------------------------------------------------------------------------------|
| Locking Type              | Kit Number |                                                                                       |
| Non-Locking               | 984H87     |                                                                                       |

## Silencers

| Port Size | Thread Type | Model Number |              | Avg. $C_v$ | Dimensions inches (mm) |           | Weight lb (kg) |
|-----------|-------------|--------------|--------------|------------|------------------------|-----------|----------------|
|           |             | NPT Threads  | BSPT Threads |            | A                      | B         |                |
| 1/4       | Male        | 5500A2003    | D5500A2003   | 2.1        | 0.9 (21)               | 2.2 (55)  | 0.1 (0.1)      |
| 3/8       | Male        | 5500A3013    | D5500A3013   | 2.7        | 0.9 (21)               | 2.2 (55)  | 0.1 (0.1)      |
| 3/8       | Male        | 5500A3003    | D5500A3003   | 4.3        | 1.3 (32)               | 3.5 (88)  | 0.2 (0.1)      |
| 1/2       | Male        | 5500A4003    | D5500A4003   | 4.7        | 1.3 (32)               | 3.6 (91)  | 0.2 (0.1)      |
| 3/4       | Male        | 5500A5013    | D5500A5013   | 5.1        | 1.3 (32)               | 3.6 (92)  | 0.2 (0.1)      |
| 3/4       | Male        | 5500A5003    | D5500A5003   | 11.5       | 2.0 (51)               | 5.3 (135) | 0.6 (0.3)      |
| 1         | Male        | 5500A6003    | D5500A6003   | 14.6       | 2.0 (51)               | 5.4 (138) | 0.6 (0.3)      |
| 1 1/4     | Male        | 5500A7013    | D5500A7013   | 16.4       | 2.0 (51)               | 5.5 (140) | 0.6 (0.3)      |

**Pressure Range:** 0 to 150 psig (0 to 10.3 bar) maximum. **Flow Media:** Filtered air.



Please read carefully and thoroughly all of the

on the inside back cover.

# General Information

## Standard Specifications

The standard specifications for the products on each page of this catalog are given on the same page or referenced. For solenoid pilot valves, models with internal pilot supply are listed. Most models are also available for use with external pilot supply or have a built-in pilot supply selector valve.

The products in this catalog are intended for use in industrial pneumatic systems. Most products are adaptable to other uses and conditions not covered by the standard specifications given in this catalog. Weights shown are approximate and are subject to change. Dimensions given, unless otherwise noted, are envelope dimensions (not for mounting). Consult ROSS for further information.

## Port Threads

Ports of valves and bases described in this catalog have NPT (ANSI B2.1) threads. Other thread types can be specified by putting an appropriate prefix letter on the model or part number when ordering.

Thread Types by Model Prefix Letter

| Pneumatic Port Threads                        | Prefix Letter | Threaded Electrical Opening |
|-----------------------------------------------|---------------|-----------------------------|
| NPT (ANSI B2.1)                               | None          | NPT                         |
| ISO 228 - DIN 259 Parallel, BSPP <sup>#</sup> | C*            | —                           |
| ISO 228 - DIN 259 Parallel, BSPP <sup>#</sup> | D             | G                           |
| ISO 228 - JIS B0203 Tapered <sup>#</sup>      | J             | ISO                         |
| SAE 1926- ISO 11926                           | S             | NPT                         |

\* Used only for filters, regulators, lubricators.

<sup>#</sup> ISO 228 threads supersedes BSPP, G and JIS thread types.

## Flow Ratings

Flow ratings are expressed as  $C_v$  where  $C_v = 1$  corresponds to a steady state air flow of approximately 32 scfm under the following conditions:

Inlet pressure = 100 psig (6.7 bar)  
Pressure drop = 10 psi (0.69 bar)  
Air temperature = 68°F (20°C)  
Relative humidity = 36%

**Note:** Because widely differing test standards are used to measure  $C_v$  values, the figures given in this catalog should not be used to compare ROSS valves with those of other makers. The  $C_v$  ratings given here are intended only for use with performance charts published by ROSS. The  $C_v$  ratings are averages for the various flow paths through the valve and are for steady flow conditions.

## Approvals and Certifications

ROSS products are designed to meet a number of industrial standards, including the Canadian Standards Association (C.S.A.) guidelines. For more information on specific product approvals, contact your local distributor or ROSS.

## Solenoids

All ROSS standard solenoids are rated for continuous duty (unless noted otherwise) and will operate the valve within the air pressure range specified in this catalog.

**Explosion-Proof Solenoid Pilot available, for more information consult ROSS.**

When ordering a solenoid valve, also specify the desired solenoid voltage and hertz.

Voltage Types by Model Suffix Letter

| Voltage      | Suffix Letter |
|--------------|---------------|
| 120 volts AC | Z             |
| 220 volts AC | Y             |
| 12 volts DC  | H             |
| 24 volts DC  | W             |
| 48 volts DC  | M             |
| 90 volts DC  | K             |
| 110 volts DC | P             |
| 125 volts DC | C             |

In addition, the following voltages are available:

200, 220 volts AC, 50 Hz  
200, 240, 480 volts AC, 60 Hz  
24, 48, 220 volts AC, 50 Hz  
240 volts AC, 60 Hz  
200, 220 volts AC, 50 Hz  
200, 240 volts AC, 60 Hz.

For example: Model 2773B5001, 120 volts AC, 60 Hz.  
Model W6076B2401, 220 volts AC, 50 Hz.

**Please note that not all configurations are available for all models.**

## Port Identification

Valve symbols in this catalog conform to the ISO 1219-1:1991 standard of the International Organization for Standardization (ISO) and the SAE J2051 standard of the Society of Automotive Engineers (SAE) respectively.

## Order Placement

**For order placement, consult ROSS or your local ROSS distributor.**

# CAUTIONS, WARNINGS and STANDARD WARRANTY

## PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure that all sources of energy are turned off, the entire pneumatic system is shut off and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).
2. All ROSS products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any installation can be tampered with or need servicing after installation, persons responsible for the safety of others or the care of equipment must check every installation on a regular basis and perform all necessary maintenance.
3. All applicable instructions should be read and complied with before using any fluid power system in order to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS location listed on the cover of this document.
4. Each ROSS product should be used within its specification limits. In addition, use only ROSS parts to repair ROSS products.

**WARNING:** *Failure to follow these directions can adversely affect the performance of the product or result in the potential for human injury or damage to property.*

## FILTRATION and LUBRICATION

5. Dirt, scale, moisture, etc. are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. ROSS recommends a filter with a 5-micron rating for normal applications.
6. All standard ROSS filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Do *not* fail to use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition, hazardous leakage, and the potential for human injury or damage to property. Immediately replace a crazed, cracked, or deteriorated bowl. When bowl gets dirty, replace it or wipe it with a clean dry cloth.

7. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum based oils with oxidation inhibitors, an aniline point between 180°F (82°C) and 220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks human injury, and/or damage to property.

## AVOID INTAKE/EXHAUST RESTRICTION

8. Do not restrict the air flow in the supply line. To do so could reduce the pressure of the supply air below the minimum requirements for the valve and thereby cause erratic action.
9. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

**WARNING:** *ROSS expressly disclaims all warranties and responsibility for any unsatisfactory performance or injuries caused by the use of the wrong type, wrong size, or an inadequately maintained silencer installed with a ROSS product.*

## POWER PRESSES

10. Mechanical power presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.

## ENERGY ISOLATION/EMERGENCY STOP

11. Per specifications and regulations, ROSS L-O-X® and L-O-X® with EEZ-ON® operation products are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

## STANDARD WARRANTY

limited to repair or replacement of the product or refund of the purchase price paid solely at the discretion of ROSS and provided such product is returned to ROSS freight prepaid and upon examination by ROSS is found to be defective. This warranty becomes void in the event that product has been subject to misuse, misapplication, improper maintenance, modification or tampering.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND ROSS EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ROSS MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS ROSS LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF ROSS MAY EXTEND THE LIABILITY OF ROSS AS SET FORTH HEREIN.

All products sold by ROSS CONTROLS are warranted for a one-year period [with the exception of all Filters, Regulators and Lubricators ("FRLs") which are warranted for a period of seven years] from the date of purchase to be free of defects in material and workmanship. ROSS' obligation under this warranty is