



T&B®

Metal Clad Cable Termination Fittings & Accessories

T&B Catalog Number:

UPC Number: STE050
 Status: 78621082257
 Description: Active

Star Teck Extreme aluminum jacketed cable fittings hub size 1/2 inch.

Features

	Powergrip grounding ring.
	Removable armor-stop for greater cable ranges.
	Elastomeric collar ring/busing for greater cable ranges.
	Built-in jacket stripping gauge on gland nut.
	Gland nut can be tightened with hammer and screwdriver.

Application

	Provides means for passing armored, metal clad, jacketed cable through a bulkhead or enclosure in hazardous areas. (these fittings are suitable for hazardous areas when used with T&B sealing compound).
	Form a mechanical grip and water and/or oil-resistant termination.
	Provide grounding continuity of cable armor.

General

Material	Aluminum
Strip Length (inches)	1 1/4

Dimension Information


Hub Size (inches)	1/2
Dimension B (inches)	2.650
Dimension C (inches)	1.630
A1: Throat Diameter Minimum (w/Armor Stop)	0.505
A2: Throat Diameter Minimum (wo/Armor Stop)	0.612
Range Over Jacket - Minimum (inches)	0.600
Range Over Jacket - Maximum (inches)	0.985
Range Over Armor - Minimum (inches)	0.520
Range Over Armor - Maximum (inches)	0.895
Strip Length (inches)	1 1/4

Packaging

Package in Units	20
T&B Sold in UOM	Each
T&B Weight Per UOM	20 lbs. per 100

Application Support

T&B Instruction Sheets	ta01766-tb2
Product Specifications & Overview	Available on Website
	Available on Website

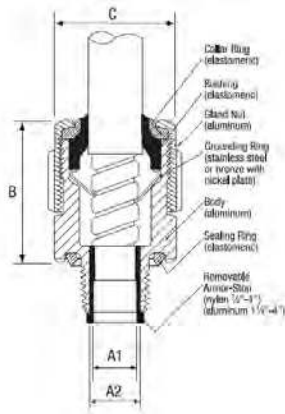

Product Brochure-Star Teck Extreme
Director™ Cable Fittings

Notes

*Note	UL Listed watertight NEMA Type 6P
**Note	1/2" Fittings do not have a removable armor stop.

Certifications

RoHS Compliance	Yes
-----------------	-----

Certifications



File Nbr:
E 38947

For further technical assistance, please contact us...

T&B Technical Support
MS 3B-50
8155 T&B Blvd.
Memphis, TN 38125