

POLO+ 3 A/EW 15W 830 AN-96
304563



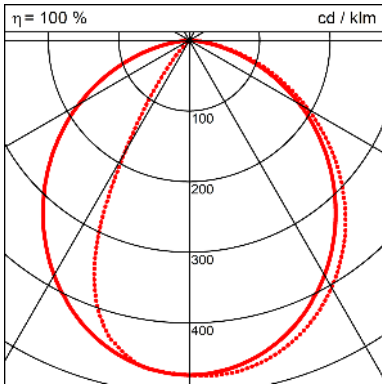

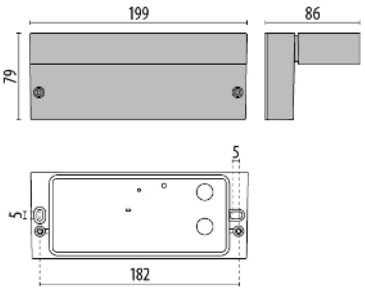

Luminaires

Hersteller	Performance in Lighting
Article number	304563
Product name	POLO+ 3 A/EW 15W 830 AN-96
Product group	OUTDOOR | EXTERIOR WALL
Mounting type	Surface mounted
Mounting place	Wall
Test mark	CE

Model / Variant / Configuration

Number / Name	---

Description

Product without accessories

Luminaires

Absolute Photometry	
LiTG class	A40
CIE flux codes	57 85 97 100 100
Protection degree	IP 65

Dimensions

Length/Width/Height	87mm/80mm/199mm

Description

Part number: 304563. Serie: POLO+.
Wall-mounted LED luminaire, comprising: Die-cast aluminium housing, polyester powder coat finish ISO 9227/12944. ISO 9223 (C5) . Extra clear, toughened, flat glass diffuser, matt and silk-screened on the inside. Anti-ageing custom moulded silicone sealing gasket(s). Driver On Board 220-240V 50/60Hz LED module protected against surges up to 500 V. Stainless steel locking hardware. Glare control and upward light pollution laws compliant (0% ULOR rating).
Product data | ETIM Group: EG000027. ETIM Class: EC002892.
General information | Lampholder: LED. Lightsource lumen output [lm]: 2025. Luminaire lumen output [lm]: 687.3. Luminaire wattage [W]: 15 W. Luminous efficacy [lm/W]: 46. CRI: 80. Colour temperature [K]: 3000. Colour / Finishing: AN-96 / Anthracite gray / Textured. IP degree of protection: IP65. IK05 0.7J xx3. Protection class: I. Optic: A/EW - Asymmetric Extra-Wide. Net weight [kg]: 0.68. Overall length [mm]: 199. Overall width [mm]: 86. Overall height [mm]: 79.
Mechanical features | Shape: Rectangular. Housing material: Aluminium. Diffuser material: Glass.
Electrical features | Voltage type: AC. Input voltage [V AC]: 220/240. Input frequency [Hz]: 50/60. Power factor / COS Φ: 0.9. Inrush current [A/µs]: 3 / 136. C10 1.5 mm²: 44. C16 2.5 mm²: 57. B10 1.5 mm²: 27. B16 2.5 mm²: 44.
Installation | Application area: PROFESSIONAL OUTDOOR. Mounting type: Wall surface. Min. ambient temperature [°C]: -20. Max. ambient temperature [°C]: 35.
Light features | Lamps: 1. ILCOS: DSS. MacAdam: 3. Lumen maintenance: L80B10@66800h. Distribution of light emission: Direct. Zero light pollution (ULR = 0%). CIE flux code n.3 95.
Certifications | CE certified. EAC certified. UKCA certified. RCM certified. Mountable on normally inflammable surfaces.