

Stops

adjustable, with end position feedback



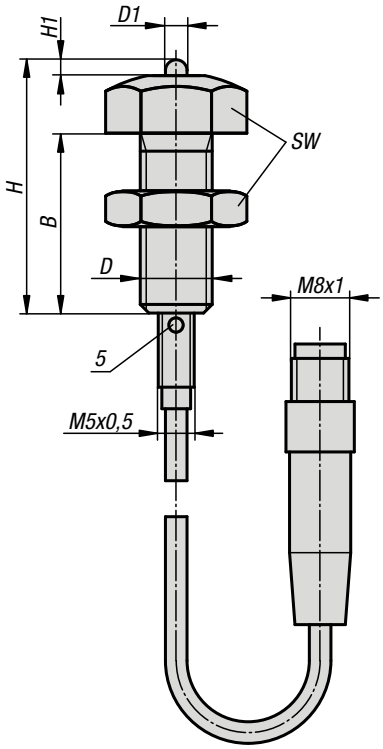

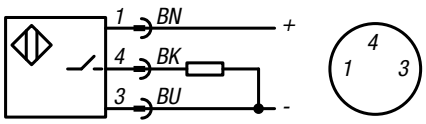

Material:
Screw and plunger stainless steel 1.4301.
Guide bush stainless steel 1.4112.
Sensor housing stainless steel.

Version:
Screw and plunger, bright.
Guide bushing, bright.
Sensor housing, bright.
Inductive sensor:
Relay (NO)
Operating voltage 10 - 30 V DC
Operating current 100 mA
Switching distance 0.8 mm
Protection class: IP 67
Connection type: 0.3 m PUR cable with connector plug
Temperature range: -25°C - +70°C
Approval: CE, c-UL-us

Sample order:
K0581.080352

Note:
The ensured sensing distance is achieved if the plunger is actuated flush up to the stop surface of the guide bush. The sensor is supplied unassembled.

Installation recommendation: glue in with Loctite 638.

Caution: screw sensor in until it comes to a stop.

Safety:
End position feedback stops are not suitable for personal protection.

Drawing reference:
5) LED-indicator

BN = brown
BK = black
BU = blue

KIPP Stops, adjustable, with end position feedback

Order No.	Size	B	D	D1	H	H1	SW
K0581.080352	1	25	M8	3	35,2	2	13
K0581.100352	2	25	M10	3	35,2	2	17
K0581.120352	3	25	M12	3	35,2	2	19