

Incremental encoders

Solid shaft with clamping or synchro flange

Increments per turn 100...5000

EIL580 - solid shaft



EIL580 with clamping flange

Features

- Precise optical sensing technique with latest technology
- Electric interface TTL and HTL
- Clamping or synchro flange
- High protection max. IP 67
- High resistance to shock and vibrations
- Wide range voltage supply 4.75...30 VDC
- Increments per turn max. 5000

Technical data - electrical ratings

Voltage supply	5 VDC $\pm 5\%$ 8...30 VDC 4.75...30 VDC
Reverse polarity protection	Yes
Short-circuit proof	Yes (HTL) Yes (TTL, max. 1 s and 1 signal)
Consumption w/o load	≤ 70 mA
Resolution (steps/turn)	100...5000
Phase shift	$90^\circ \pm 10^\circ$
Scan ratio	40...60 %
Reference signal	Zero pulse, width $90^\circ \pm 10\%$
Sensing method	Optical
Output frequency	≤ 300 kHz (TTL) ≤ 160 kHz (HTL)
Output circuit	TTL/RS422 HTL/push pull
Interference immunity	DIN EN 61000-6-2
Emitted interference	DIN EN 61000-6-3
Approval	UL 508 / CSA 22.2

Technical data - mechanical design

Dimensions (flange)	$\varnothing 58$ mm
Shaft loading	≤ 40 N axial ≤ 80 N radial
Protection DIN EN 60529	IP 65 (without shaft seal), IP 67 (with shaft seal)
Operating speed	≤ 6000 rpm (+20 °C, IP 67) ≤ 12000 rpm (+20 °C, IP 65)
Starting torque	≤ 0.01 Nm (+20 °C, IP 65) ≤ 0.02 Nm (+20 °C, IP 67)
Materials	Housing: aluminium die-cast Flange: aluminium die-cast Solid shaft: stainless steel
Operating temperature	-40...+85 °C
Relative humidity	90 % non-condensing
Resistance	

Connection

Weight approx.

EIL580 - clamping flange

Shaft type

EIL580 - synchro flange

Shaft type

Incremental encoders

Solid shaft with clamping or synchro flange

Increments per turn 100...5000

EIL580 - solid shaft

Part number

Clamping flange

EIL580-S **C** **10** **A**

Operating temperature
A -40...+85 °C

See part number (pulses)

Voltage supply / output circuit

E 5 VDC, TTL/RS422, 6 channel

H 8...30 VDC, TTL/RS422, 6 channel

N 8...30 VDC, HTL/push pull, 6 channel

Q 4.75...30 VDC, HTL/push pull, 6 channel

Connection

R Cable radial, 1 m

L Cable radial, 2 m

F Flange connector M23, 12-pin, radial, pin terminals, ccw

B Flange connector M12, 8-pin, radial, pin terminals, ccw

Protection

5 IP 65

7 IP 67

Specification solid shaft

10 ø10 x 20 mm, with edge

Flange

C Clamping flange, centering collar ø36 mm, M3/M4

Printed in **bold** = standard items (up to the quantity of 10 will be supplied within 5 working days).

Part number (pulses)

00100	00300	00720	01250	02500
00120	00360	00800	01440	03000
00150	00400	00900	01500	03600
00200	00500	01000	01800	04000
00250	00512	01024	02000	04096
00256	00600	01200	02048	05000

Stock items

EIL580-SC10.5FE.01024.A	EIL580-SC10.5FE.02048.A
EIL580-SC10.5FN.01024.A	EIL580-SC10.5FN.02048.A

Numerous stock items in single quantity will be supplied within 24 hours respectively one day ex works.

Incremental encoders

Solid shaft with clamping or synchro flange

Increments per turn 100...5000

EIL580 - solid shaft

Part number

Synchro flange

EIL580-S Y 06 A

Operating temperature
A -40...+85 °C

See part number (pulses)

Voltage supply / output circuit

E 5 VDC, TTL/RS422, 6 channel

H 8...30 VDC, TTL/RS422, 6 channel

N 8...30 VDC, HTL/push pull, 6 channel

Q 4.75...30 VDC, HTL/push pull, 6 channel

Connection

R Cable radial, 1 m

L Cable radial, 2 m

F Flange connector M23, 12-pin, radial, pin terminals, ccw

B Flange connector M12, 8-pin, radial, pin terminals, ccw

Protection

5 IP 65

7 IP 67

Specification solid shaft

06 ø6 x 10 mm, with edge

Flange

Y Synchro flange, synchro flute ø52 mm, M3/M4

Printed in **bold** = standard items (up to the quantity of 10 will be supplied within 5 working days).

Part number (pulses)

00100	00300	00720	01250	02500
00120	00360	00800	01440	03000
00150	00400	00900	01500	03600
00200	00500	01000	01800	04000
00250	00512	01024	02000	04096
00256	00600	01200	02048	05000

Stock items

EIL580-SY06.5FE.01024.A	EIL580-SY06.5FE.02048.A
EIL580-SY06.5FN.01024.A	EIL580-SY06.5FN.02048.A

Numerous stock items in single quantity will be supplied within 24 hours respectively one day ex works.

Incremental encoders

Solid shaft with clamping or synchro flange

Increments per turn 100...5000

EIL580 - solid shaft

Accessories

Connectors and cables

10127844	Connector M12, 8-pin, A-coded, straight, 2 m cable
10129332	Connector M12, 8-pin, A-coded, straight, 5 m cable
10129333	Connector M12, 8-pin, A-coded, straight, 10 m cable
11053961	Connector M12, 8-pin, A-coded, angular, 2 m cable
11053962	Connector M12, 8-pin, A-coded, angular, 5 m cable
10170054	Connector M12, 8-pin, A-coded, angular, 10 m cable
10164705	Connector S2BG12, M23, 12-pin
11095302	Connector S2BG12, M23, 12-pin, 1 m cable
11100408	Connector S2BG12, M23, 12-pin, 2 m cable
11100430	Connector S2BG12, M23, 12-pin, 5 m cable
11100431	Connector S2BG12, M23, 12-pin, 10 m cable

Mounting accessories for EIL580 - clamping flange

11065915	Coupling CPS25 L=19 d1=04/d2=10
11065918	Coupling CPS25 L=19 d1=07/d2=10
11065920	Coupling CPS25 L=19 d1=08/d2=10
11065921	Coupling CPS25 L=19 d1=09/d2=10
11065922	Coupling CPS25 L=19 d1=10/d2=06
11065923	Coupling CPS25 L=19 d1=10/d2=10
11065924	Coupling CPS25 L=19 d1=10/d2=11
11065925	Coupling CPS25 L=19 d1=10/d2=12
10141132	Spring washer coupling D1=06 / D2=10
10141133	Spring washer coupling D1=10 / D2=10
11034138	Spring washer coupling D1=10 / D2=16
11034140	Spring washer coupling D1=10 / D2=14
11034141	Spring washer coupling D1=10 / D2=12
11050507	Bellows coupling aluminium/stainless steel D1=06 / D2=10
11101781	Double loops coupling D1=10 / D2=10
10125051	Mounting adaptor for encoders with clamping flange
11065545	Set of eccentric fixings type A
11101893	Spring encoder arm

Mounting accessories for EIL580 - synchro flange

11065916	Coupling CPS25 L=19 d1=06/d2=06
11065917	Coupling CPS25 L=19 d1=06/d2=08
11065922	Coupling CPS25 L=19 d1=10/d2=06
11065926	Coupling CPS25 L=19 d1=11/d2=06
11065928	Coupling CPS25 L=19 d1=12/d2=06
10141131	Spring washer coupling D1=06 / D2=06

Mounting accessories for EIL580 - synchro flange

10141132	Spring washer coupling D1=06 / D2=10
11034139	Spring washer coupling D1=06 / D2=16
11050507	Bellows coupling aluminium/stainless steel D1=06 / D2=10
10117667	Mounting adaptor for encoders with synchro flange
10117668	Set of eccentric fixings for mounting clamp (10117667) with 3x eccentric fixings, screws and nuts
11065545	Set of eccentric fixings type A

For matching measuring wheels please see chapter accessories, "measuring wheels" (MR).


Incremental encoders

Solid shaft with clamping or synchro flange
Increments per turn 100...5000

EIL580 - solid shaft

Output signals

Clockwise rotating direction when looking at flange.

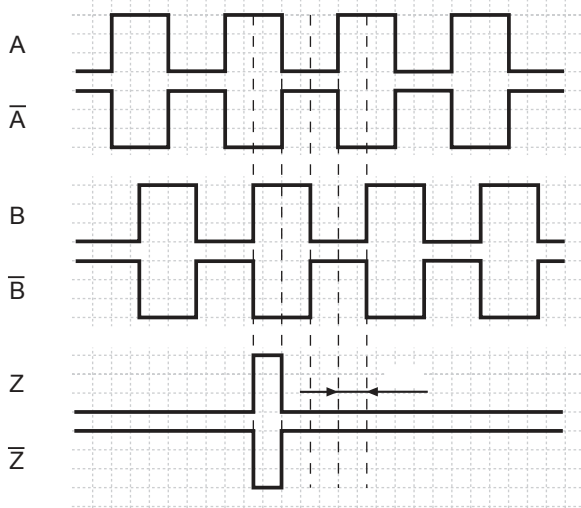


Trigger level

Outputs	TTL/RS422
Output level High	$\geq 2.5 \text{ V}$
Output level Low	$\leq 0.5 \text{ V}$
Load	$\leq 20 \text{ mA}$

Outputs	HTL/Push-pull
Output level High	$\geq \text{UB} - 3 \text{ V}$
Output level Low	$\leq 1.5 \text{ V}$
Load	$\leq 20 \text{ mA}$


Terminal assignment

Flange connector M23, 12-pin / cable		
Pin	Core color	Assignment
1	pink	Signal B inv.
2	—	—
3	blue	Signal Z (zero pulse)
4	red	Signal Z inv. (zero pulse inv.)
5	green	Signal A
6	yellow	Signal A inv.
7	—	—
8	grey	Signal B
9	—	—
10	white	GND
11	—	—
12	brown	UB
Screen:		Connected to housing
Cable data:		PVC, 4x2x0.14 mm ² , bending radius >32.5 mm Outer diameter 6.5 mm



Flange connector M12, 8-pin

Pin	Assignment
1	GND
2	UB
3	Signal A
4	Signal A inv.
5	Signal B
6	Signal B inv.
7	Signal Z (zero pulse)
8	Signal Z inv. (zero pulse inv.)




Incremental encoders

Solid shaft with clamping or synchro flange
Increments per turn 100...5000


EIL580 - solid shaft

Dimensions


EIL580 - clamping flange, flange connector M12, radial

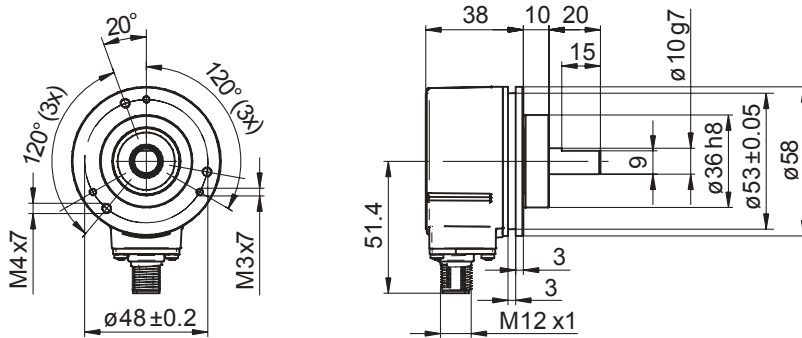

EIL580 - clamping flange, flange connector M23, radial

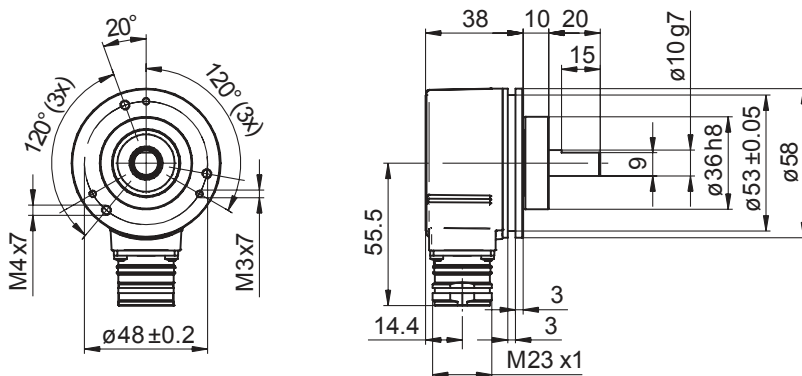

EIL580 - clamping flange, cable radial

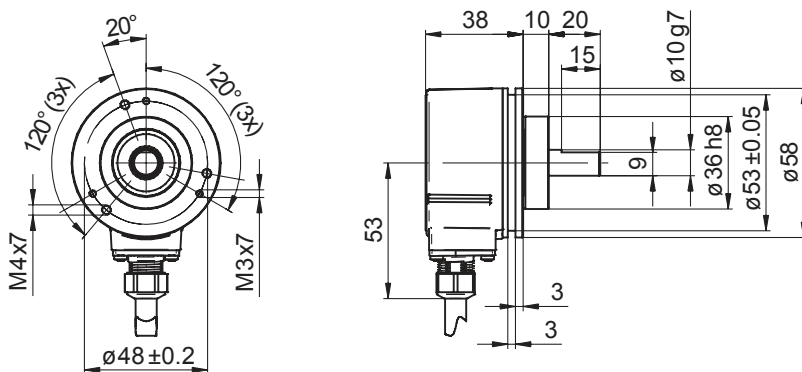

Incremental encoders


Solid shaft with clamping or synchro flange

Increments per turn 100...5000


EIL580 - solid shaft

Dimensions

EIL580 - synchro flange, flange connector M12, radial

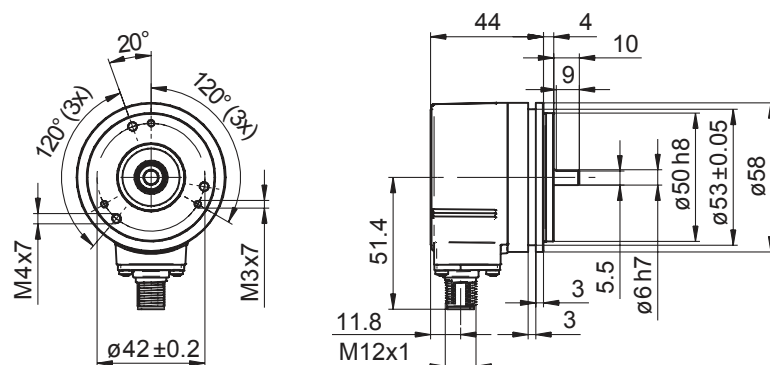

EIL580 - synchro flange, flange connector M23, radial

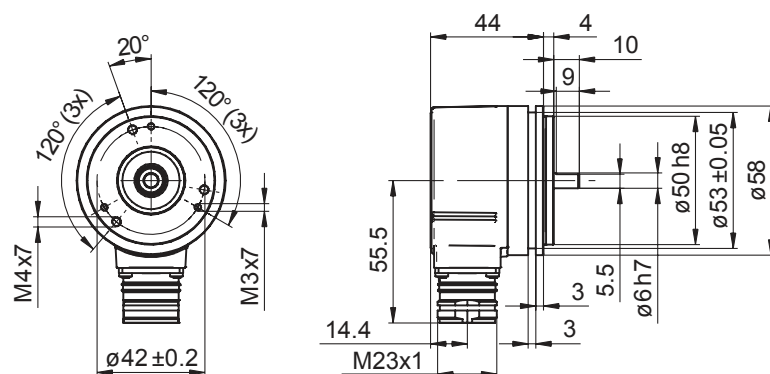

EIL580 - synchro flange, cable radial

