



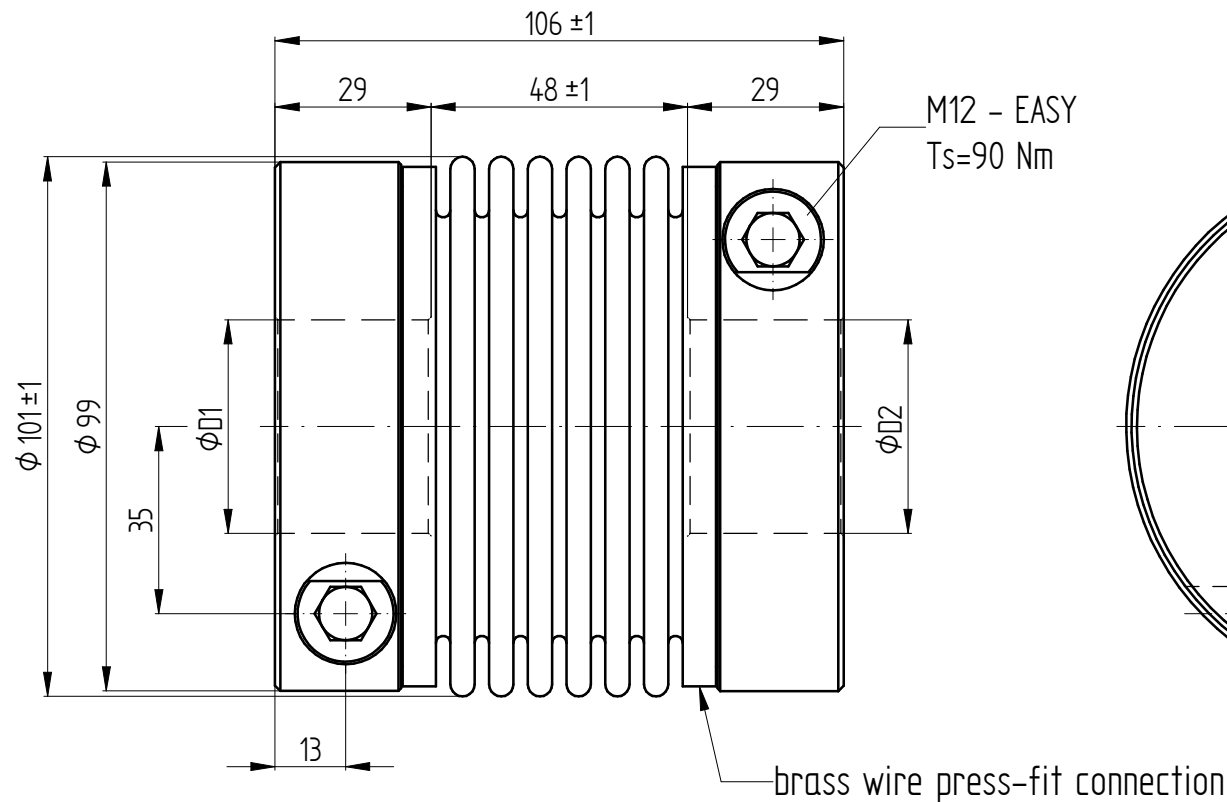

technical data:

nominal torque: 400 Nm
 maximum torque: 600 Nm
 torsional stiffness: 47 Nm/arcmin
 moment of inertia: $2,4 \times 10^{-3} \text{ kgm}^2$
 max. axial shaft displacement: $\pm 1 \text{ mm}$
 max. lateral shaft displacement: 0,3 mm
 axial spring rate: 100 N/mm
 lateral spring rate: 640 N/mm
 temperature range: -40° up to $+200^\circ\text{C}$
 maximum speed: 11.000 rpm
 $D1/2\text{min}/\text{max} = \phi 30 / \phi 55 \text{ mm}$
 mass: approx. 1,5 kg

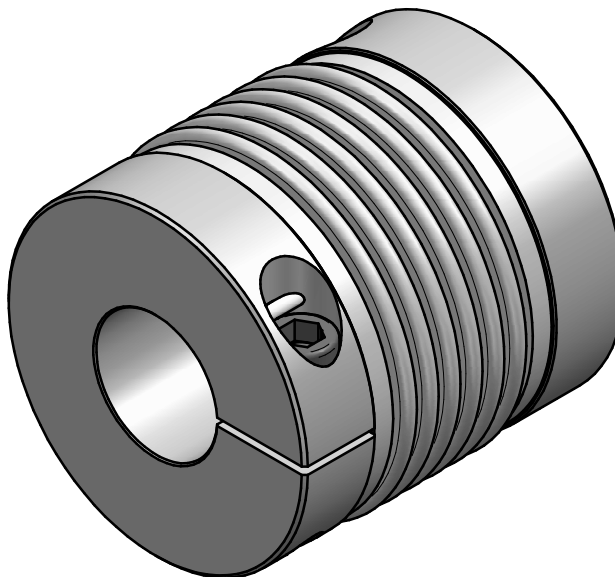

material:

bellows: stainless steel
 hubs: high-tensile strength aluminium
 clamping screws: ISO 4762 - 12.9
 press-fit wire: brass

		Änderung				Werkstoffbezeichnung	Werkstoffnummer	Maßstab 1:1
						-	-	
						Rohteil-/Vorteilnummer	Gewicht	
						-	- kg	
			gepr.	07.09.23	IA	metal bellows coupling		
						KM 400 - standard		
Passung	Abmaß	gez.	11.05.17	Be				
DIN ISO 13715	DIN ISO 2768-mK		Datum	Name	Benennung	Format A3	MB-064 14320-e	
	0,5 ... 6 ± 0,1 6 ... 30 ± 0,2 30 ... 120 ± 0,3 120 ... 315 ± 0,5 315 ... 1000 ± 0,8		 D-63839-Kleinwallstadt		Artikelnummer			
			Ersatz für		-	ersetzt durch		

MB-064 14320-e