


DATASHEET

EtherNet/IP™ Server to IEC 61850 Client Gateway PLX82-EIP-61850

The two ports allow the IEC 61850 and EtherNet/IP™ protocols to reside on separate subnets.

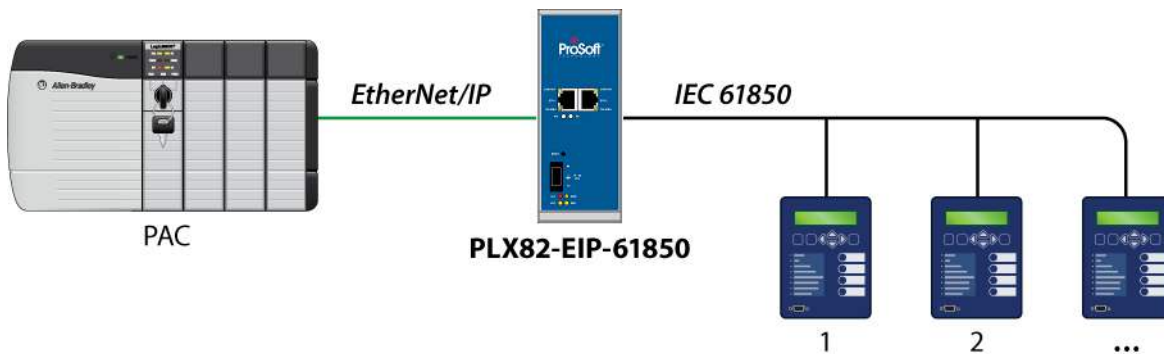

Features

- ◆ The supplied configuration software enables you to import all of your relevant IED tags into your Logix® controller tag database, reducing configuration time and errors
- ◆ Multiple EtherNet/IP™ I/O connections give you large amounts of data to transfer in a real time environment
- ◆ Standards-based identification of device types simplifies implementation and maintenance

Configuration

Specifications – IEC 61850 Client

Supports up to 20 IEDs on the network with a maximum of 300 data attributes each. (max number of data attributes is determined by user configured data types and size of user configured data points)

Specification	Description
ACSI Basic Conformance	
SCSMs supported	SCSM: IEC 61850 8.1(MMS) used
ACSI Model Conformance	
Reporting	Buffered Report Control Block (BRCB) Unbuffered Report Control Block (URCB)
GOOSE	entryID, DataRefInc
Control	Direct-with-Normal-Security SBO-with-Normal-Security Direct-with-Enhanced-Security SBO-with-Enhanced-Security
Logical Nodes	IEC 61850 Logical Nodes, including Logical Nodes for Hydro Power Plants and Logical Nodes for Wind Power Plants
Configurable Parameters	MMS Command Delay

Specification	Description
Configurable Parameters	SNTP/NTP server synchronization rate in minutes SNTP/NTP server address

Specifications – EtherNet/IP™ Server

The gateway supports multiple communication methods to fit your application. In addition, it features multiple EtherNet/IP™ I/O Connections. (20 maximum, providing support for 10,000 bytes of input data and 9920 bytes of output data)

Specification	Description
Class 1 Messaging	I/O connections for real-time data transfer
Class 3 Messaging	PLC messaging support



Where Automation Connects™

Global Distribution

ProSoft Technology® products are distributed and supported worldwide through a network of over 500 distributors in over 50 countries. Our knowledgeable distributors are familiar with your application needs. For a complete list of distributors, go to our website at:

ts are
ort.
al
or

Global Offices

We are where you are

ProSoft Technology has regional offices worldwide available to help you with all your industrial application needs. If you need help choosing a ProSoft Technology solution for your particular application check out our contact information under distributor sales on the website at:

Whether your application is large or small, our technical professionals are there to help you choose the right communication solution.

Hardware Specifications

Specification	Description
Power Supply	24 VDC nominal 10 to 36 VDC power input allowed Positive, Negative, GND Terminals 2.5 mm screwdriver blade
Current Load	200 mA max @ 24 VDC 150 mA max @ 32 VDC 450 mA max @ 10 VDC
Operating Temperature	0°C to 70°C (32°F to 158°F)
Storage Temperature	-40°C to 85°C (-40°F to 185°F)
Relative Humidity	5% to 95%, with no condensation
Dimensions H x W x D	5.52 x 2.06 x 4.37 in 14.02 x 5.23 x 11.1 cm
Shock	IEC 60068-2-27; 15G @ 11ms (Operational) IEC 60068-2-27; 30G @ 18ms (Non-Operational)
Vibration	IEC 60068-2-6; 5G, 10 to 150 Hz
LED Indicators	ERR, CFG, FLT, PWR
Ethernet Ports (E1, E2)	10/100 Base-T full- and half-duplex RJ45 Connector Link and Activity LED indicators Electrical Isolation 1500 V rms at 50 to 60 Hz for 60 s, applied as specified in section 5.3.2 of IEC 60950: 1991 Ethernet Broadcast Storm Resiliency = less than or equal to 5000 [ARP] frames-per-second and less than or equal to 5 minutes duration
Shipped with Each Unit	One - J180 screw terminal plug One - HRD250 screwdriver

Agency Approvals and Certifications



Additional Products

ProSoft Technology® offers a full complement of hardware and software solutions for a wide variety of industrial communication platforms. For a complete list of products, visit our website at:

Ordering Information

To order this product, please use the following:

EtherNet/IP™ Server to IEC 61850 Client Gateway

PLX82-EIP-61850

To place an order, please contact your local ProSoft Technology distributor. For a list of ProSoft Technology distributors near you, go to:

and select *Where to Buy* from the menu.

For Public Use.

Specifications subject to change without notice.