



Tipo di ingresso

Bifase

	min	°C	-40
	max	°C	+71
Temperatura di stoccaggio			
	min	°C	-40
	max	°C	+85
Declassamento		%/°C	2,5% / °C sopra 60 °C


Custodia

Materiale	Plastica
Grado di protezione (IEC)	IP20
Dimensioni (L x A x P)	mm 54 x 90 x 115
Peso prodotto	g 570

Installazioni


Montaggio	Su guida DIN da 35 mm
-----------	--------------------------

Dimensioni

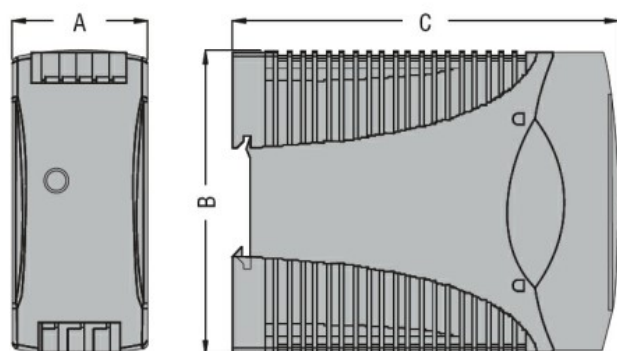

TYPE	A	B	C
PSL1 005 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 010 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 018 24	22.5 (0.88")	90 (3.54")	115 (4.53")
PSL1 030...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 060...	40.5 (1.59")	90 (3.54")	115 (4.53")
PSL1 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSL2 100...	54 (2.12")	90 (3.54")	115 (4.53")
PSLR 20 24	54 (2.12")	90 (3.54")	115 (4.53")

Schemi elettrici

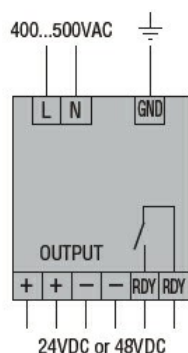

Omologazioni e conformità

Conformità

CSA C22.2 n°14
IEC/EN/BS 61000-6-2
IEC/EN/BS 61000-6-3
IEC/EN/BS 62368-1
UL 508

Omologazioni

cULus
EAC
RCM

Classificazione ETIM

ETIM 8.0

EC002540 -
Alimentazione in
corrente continua