
2



ET

Shielded

5.7 mm

Technical data sheet

Actuator sensor interface · RJ45 connector

Connection type	4-pin RJ45 Push-through contacts IDC
Cross-section AWG	24-22/1, 24-22/7,19
Weight/unit	0.025 kg
PU (units)	1

Technical data

Rated voltage U_N	30 V
Max. Power PoE	PoE+ IEEE 802.3at 30W
Rated current	≤1 A per contact
Pole number	4
Bandwidth	100 MHz
Transfer rate	1 Gbit/s
Category	Cat.5e
Shielding	shielded


Certifications/Standards

Certifications	cULus Listed (E326112)
Standards	IEC 61784-5-3

Notes and Comments


Comments	Suitable for Profinet, SERCOS3, Ethercat, Power over Ethernet+ (PoE+IEEE 802.3at) Suitable cables, see overview assignment Ethernet cables to connectors
----------	---

Dimensions

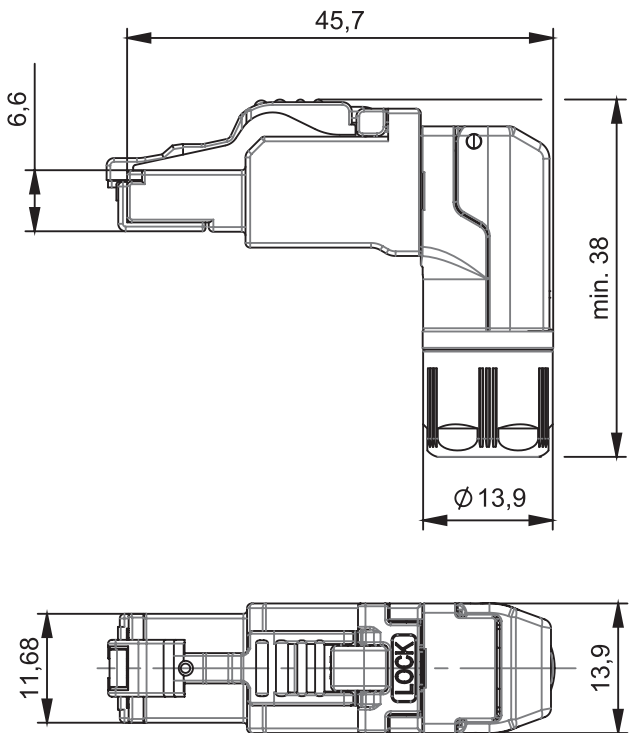

Technical data sheet
Actuator sensor interface · RJ45 connector

Connection assignment

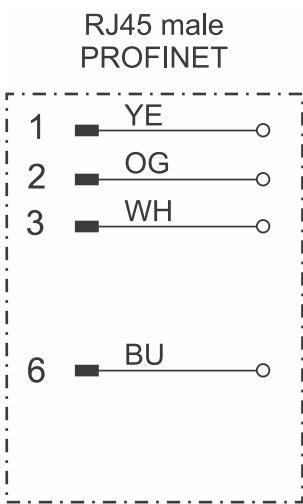

Mounting diagram

